

## DIGI-MET® QuickStart Electronic



### QuickStart-Electronic with the QuickLock-Function for only one zero setting




All digital calipers with the QuickStart-Electronic also have the **QuickLock** Function. Only set the zero position once, zero position remains stored for all further measurements. When the **QuickLock** Function is activated a lock symbol appears in the display, this ensures that the zero position is protected against any operating error caused by accidental usage of the operating keys (keys are locked). The caliper is immediately ready for measurement; once the caliper is switched ON or the slide is moved, the display is automatically activated.

The need to reset to zero as with a conventional caliper once it is switched on is obsolete.

#### Conventional

- ① Switch ON
- ② Close the measuring jaws
- ③ Set to zero
- ④ Result of measurement

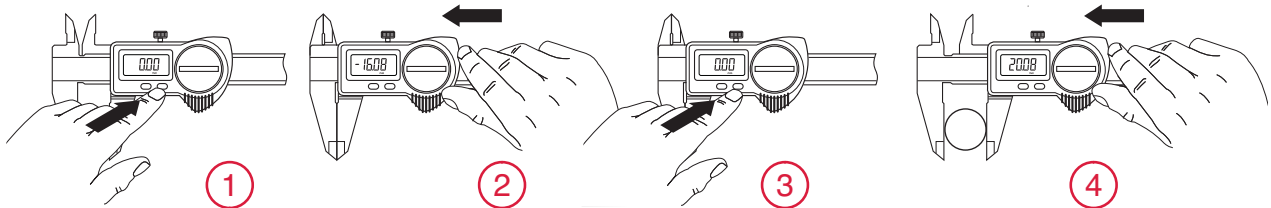

#### QuickStart Electronic




Press the ON key or move the slide

## DIGI-MET® QuickLock-Function



### 1. Set to zero

### 2. Activate the QuickLock Function

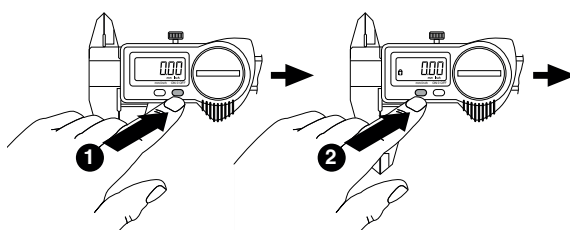


#### Advantages of the QuickLock Function

- The caliper is immediately ready for measurement
- Lock symbol appears in the display. This ensures that the zero position is protected against any operating error caused by accidental usage of the operating keys (keys are locked)



## 1326i DIGI-MET® Pocket calipers IP67 with integrated wireless

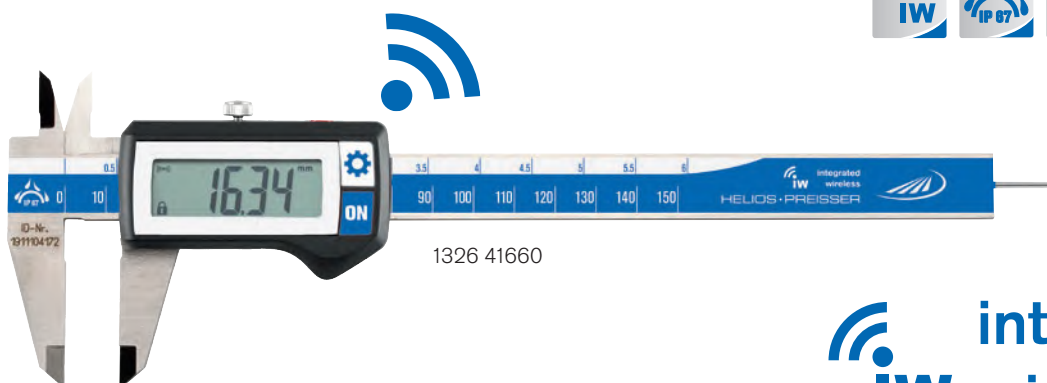

1326 41660

## integrated IW wireless

Wireless Data Transmission

### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurements

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Integrated Wireless

### Delivery

- Plastic case



More information on our i-series and Integrated Wireless on page

|   | Measuring range |        | Jaw length |      | Reading |       | Error limit | Depth gauge | Order no.  | List price |
|---|-----------------|--------|------------|------|---------|-------|-------------|-------------|------------|------------|
|   | mm              | inch   | mm         | inch | mm      | inch  | mm          |             |            | EUR        |
| ▪ | 0 - 150         | 0 - 6  | 40         | 1.6  | 0.01    | .0005 | 0.03        | round 1.5   | 1326 41660 | 218.00     |
| ▪ | 0 - 150         | 0 - 6  | 40         | 1.6  | 0.01    | .0005 | 0.03        | rectangular | 1326 41760 | 218.00     |
| ▪ | 0 - 200         | 0 - 8  | 50         | 2.0  | 0.01    | .0005 | 0.03        | rectangular | 1326 41860 | 279.00     |
| ▪ | 0 - 300         | 0 - 12 | 65         | 2.5  | 0.01    | .0005 | 0.03        | none        | 1326 42260 | 337.00     |



1998780

### Accessories

Battery, 3V-Lithium, CR 2032

i-Stick USB-receiver for Integrated Wireless

Order no.

0220 704

1998 780

List price

EUR

3.90

95.00


Integrated Wireless is intended to be sold within the European Economic Area only



## 1320 DIGI-MET® Pocket calipers



1320 416

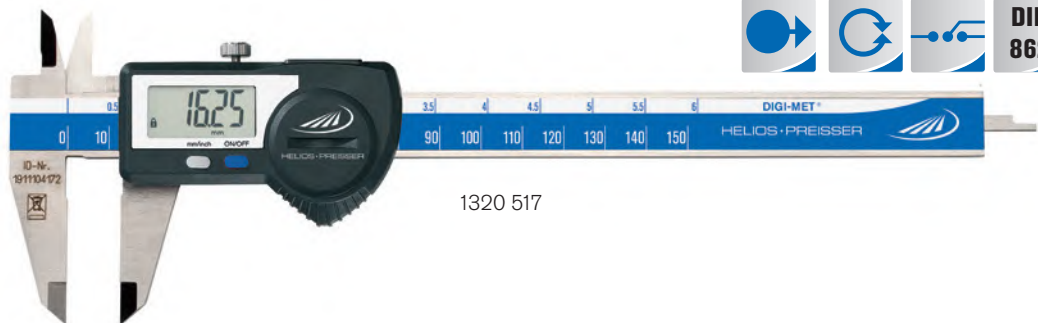

1320 517



### Model

- Inductive measuring system, resistant to moisture and sweat
- Stainless steel
- LCD display 11 mm without data output, 7.5 mm with data output
- DIN 862
- Locking screw
- Inside cross points

- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Functions

- ON / OFF
- Quick-Start
- Quick-Lock (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)

### Delivery

- Plastic case



Video electronic

| ▶◀                                                       |  | Measuring range |        | Jaw length |      | Reading |       | Error limit | Depth gauge | Order no. | List price |
|----------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|------------|------|---------|-------|-------------|-------------|-----------|------------|
|                                                          |                                                                                     | mm              | inch   | mm         | inch | mm      | inch  |             |             |           |            |
| Without data output                                      |                                                                                     |                 |        |            |      |         |       |             |             |           |            |
| ▪                                                        |                                                                                     | 0 - 150         | 0 - 6  | 40         | 1.6  | 0.01    | .0005 | 0.03        | round 1.5   | 1320 416  | 110.00     |
| ▪                                                        |                                                                                     | 0 - 150         | 0 - 6  | 40         | 1.6  | 0.01    | .0005 | 0.03        | rectangular | 1320 417  | 110.00     |
| With DATA VARIABLE                                       |                                                                                     |                 |        |            |      |         |       |             |             |           |            |
| ▪                                                        |                                                                                     | 0 - 150         | 0 - 6  | 40         | 1.6  | 0.01    | .0005 | 0.03        | round 1.5   | 1320 516  | 145.00     |
| ▪                                                        |                                                                                     | 0 - 150         | 0 - 6  | 40         | 1.6  | 0.01    | .0005 | 0.03        | rectangular | 1320 517  | 145.00     |
| ▪                                                        |                                                                                     | 0 - 200         | 0 - 8  | 50         | 2.0  | 0.01    | .0005 | 0.03        | rectangular | 1320 519  | 185.00     |
| ▪                                                        |                                                                                     | 0 - 300         | 0 - 12 | 65         | 2.5  | 0.01    | .0005 | 0.03        | none        | 1320 522  | 235.00     |
| With DATA VARIABLE, with extra long cross points (40 mm) |                                                                                     |                 |        |            |      |         |       |             |             |           |            |
| ▪                                                        |                                                                                     | 0 - 150         | 0 - 6  | 40         | 1.6  | 0.01    | .0005 | 0.03        | round 1.5   | 1320 518  | 395.00     |

More information on 1320 518 on page 58



1998720

1998501


1997501

### Accessories

|                                       | Order no. | List price |
|---------------------------------------|-----------|------------|
| Battery, 3V-Lithium, CR 2032          | 0220 704  | 3.90       |
| Data cable DATA VARIABLE to digimatic | 1998 501  | 64.00      |
| Data cable DATA VARIABLE to RS232     | 1997 501  | 50.00      |
| Data cable DATA VARIABLE to USB       | 1998 720  | 72.00      |



## 1326 DIGI-MET® Pocket calipers IP67

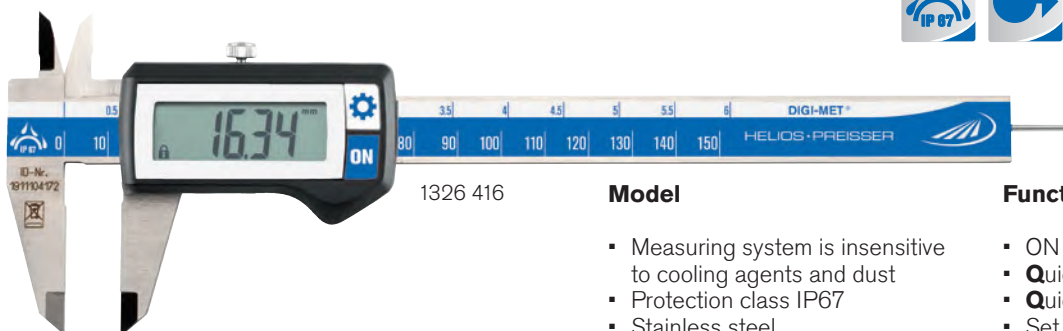

1326 416

### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)

### Delivery

- Plastic case



Video  
electronic

|   | Measuring range |        | Jaw length |      | Reading |       | Error limit | Depth gauge | Order no. | List price<br>EUR |
|---|-----------------|--------|------------|------|---------|-------|-------------|-------------|-----------|-------------------|
|   | mm              | inch   | mm         | inch | mm      | inch  |             |             |           |                   |
| ▪ | 0 - 150         | 0 - 6  | 40         | 1.6  | 0.01    | .0005 | 0.03        | round 1.5   | 1326 416  | 159.00            |
| ▪ | 0 - 150         | 0 - 6  | 40         | 1.6  | 0.01    | .0005 | 0.03        | rectangular | 1326 417  | 159.00            |
| ▪ | 0 - 200         | 0 - 8  | 50         | 2.0  | 0.01    | .0005 | 0.03        | rectangular | 1326 418  | 225.00            |
| ▪ | 0 - 300         | 0 - 12 | 65         | 2.5  | 0.01    | .0005 | 0.03        | none        | 1326 422  | 285.00            |

### With carbide-tipped measuring jaws

|   |         |       |    |     |      |       |      |           |          |        |
|---|---------|-------|----|-----|------|-------|------|-----------|----------|--------|
| ▪ | 0 - 150 | 0 - 6 | 40 | 1.6 | 0.01 | .0005 | 0.03 | round 1.5 | 1326 914 | 343.00 |
|---|---------|-------|----|-----|------|-------|------|-----------|----------|--------|

### Accessories

Battery, 3V-Lithium, CR 2032

### Order no.



0220 704

### List price

EUR

3.90

## 0220 Additional depth measuring base




### Model

- Stainless steel
- Bridge length: 75 mm
- Dimensions: 75 x 6.5 mm

|  | Order no. | List price<br>EUR |
|--|-----------|-------------------|
|  | 0220 705  | 22.40             |



## 1326 DIGI-MET® Pocket calipers IP67 with data output

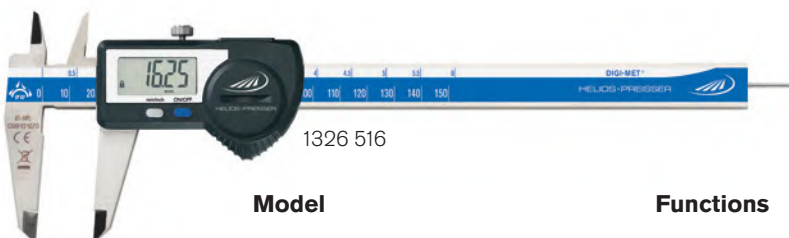

1326 516



### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Plastic case

|   | Measuring range |       | Jaw length |      | Reading |       | Error limit | Depth gauge | Order no. | List price |
|---|-----------------|-------|------------|------|---------|-------|-------------|-------------|-----------|------------|
|   | mm              | inch  | mm         | inch | mm      | inch  | mm          |             |           | EUR        |
| ■ | 0 - 150         | 0 - 6 | 40         | 1.6  | 0.01    | .0005 | 0.03        | round 1.5   | 1326 516  | 159.00     |
| ■ | 0 - 150         | 0 - 6 | 40         | 1.6  | 0.01    | .0005 | 0.03        | rectangular | 1326 517  | 159.00     |
| ■ | 0 - 200         | 0 - 8 | 50         | 2.0  | 0.01    | .0005 | 0.03        | rectangular | 1326 518  | 235.00     |



1998720

1997501

1998501

### Accessories

Battery, 3V-Lithium, CR 2032

Data cable DATA VARIABLE to RS232

Data cable DATA VARIABLE to digimatic

Data cable DATA VARIABLE to USB

### Order no.

0220 704

1997 501

1998 501

1998 720

### List price

3.90

50.00

64.00

72.00

## 1322 DIGI-MET® Pocket caliper PRISMA



### Model


- Double prisma guide with excellent sliding characteristics
- Protection class IP67
- Stainless steel
- DIN 862
- LCD display 7.5 mm
- Locking screw
- Inside cross points
- Four way measurement

### Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Quick-Start**
- Quick-Lock** (key lock)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case



|   | Measuring range |       | Jaw length |      | Reading |       | Error limit | Depth gauge | Order no. | List price |
|---|-----------------|-------|------------|------|---------|-------|-------------|-------------|-----------|------------|
|   | mm              | inch  | mm         | inch | mm      | inch  | mm          |             |           | EUR        |
| ■ | 0 - 150         | 0 - 6 | 40         | 1.6  | 0.01    | .0005 | 0.03        | round 1.5   | 1322 516  | 212.00     |



= QuickLock



= QuickStart



= Waterproof acc. IP



= Data output



= DIN



## 1998 / 0996 / 1997 Data cable



0996 701

0996 705

1997 501

1998 501


1998 720

### Model

- Length 2 m
- For use with MarCom Professional software to transfer the measured results to PC, laptop or workstation

| Model    | Description                      | Order no. | List price<br>EUR |
|----------|----------------------------------|-----------|-------------------|
| 0996 701 | Cable Opto for RS232             | 0996 701  | 77.00             |
| 0996 705 | Cable Opto for USB               | 0996 705  | 147.00            |
| 1997 501 | Cable DataVariable for RS232     | 1997 501  | 50.00             |
| 1998 501 | Cable DataVariable for Digimatic | 1998 501  | 64.00             |
| 1998 720 | Cable DataVariable for USB       | 1998 720  | 72.00             |

## 0145 Measuring tool set >>Extensions<<

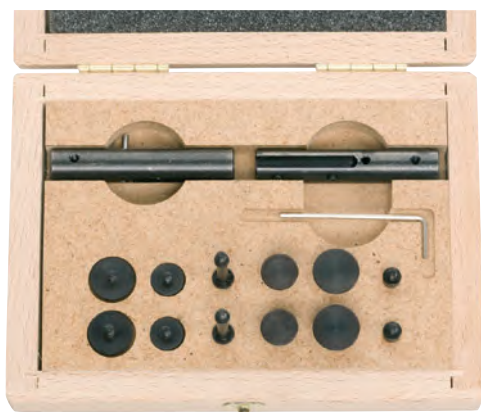

### Model

- Pairs of measuring inserts, disc dia. 6 / 10 / 12.5 mm
- Pair of measuring inserts with 60° cone, dia. 9 / 12.5 mm
- Pair of measuring inserts with cylindrical surfaces 1.5 mm
- Insert holder, right / left with thread M 2.5
- Allen wrench SW 1.2 mm
- For digital pocket calipers with max. jaw thickness of 3.5 mm

### Delivery

- Wooden box

| Model    | Description                   | Order no. | List price<br>EUR |
|----------|-------------------------------|-----------|-------------------|
| 0145 110 | Measuring tool set, 14 pieces | 0145 110  | 171.00            |



Measure distances  
between bore holes



Measure grooves



Measure distances



Measure distances  
between bore holes



Measure grooves





## 1326 Universal pocket caliper „Pocket Talent“



1

### Model

- Stainless steel
- Protection class IP67
- Factory standard
- LCD display 7.5 mm
- Locking screw
- For internal and external measurements
- Individually adaptable on problematic tasks through measuring inserts with thread M 2.5

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB


### Delivery

- Wooden box
- Measuring inserts No. 0710161\* and 0710177\*
- Planar surface Ø 4.8 mm / Ball inserts Ø 5.0 mm
- Setting standard


Models with measuring range 300 and 500 mm on page 56

|  | Measuring range |       | Jaw length | Reading |       | Order no. | List price<br>EUR |
|--|-----------------|-------|------------|---------|-------|-----------|-------------------|
|  | mm              | inch  | mm         | mm      | inch  |           |                   |
|  | 0 - 150         | 0 - 6 | 40         | 0.01    | .0005 | 1326 932  | 359.00            |


Our all-round talent can be combined with all common types of measuring inserts for indicators with a standard M 2.5 thread. This way, the Pocket Talent offers you various solutions for numerous measurement applications.




0710161\*




0710177\*



0710166



0710167



0710163



1998720



1998501



1997501



Product video

### Accessories

|                                       | Order no. | List price<br>EUR |
|---------------------------------------|-----------|-------------------|
| Battery, 3V-Lithium, CR 2032          | 0220 704  | 3.90              |
| Measuring inserts M 2.5               | 0710 161  | 3.60              |
| Measuring inserts M 2.5               | 0710 163  | 5.40              |
| Measuring inserts M 2.5               | 0710 166  | 4.90              |
| Measuring inserts M 2.5               | 0710 167  | 3.40              |
| Measuring inserts M 2.5               | 0710 177  | 6.80              |
| Setting standard for Pocket Talent    | 1326 990  | 39.00             |
| Data cable DATA VARIABLE to RS232     | 1997 501  | 50.00             |
| Data cable DATA VARIABLE to digimatic | 1998 501  | 64.00             |
| Data cable DATA VARIABLE to USB       | 1998 720  | 72.00             |



= QuickLock



= QuickStart



= Waterproof acc. IP








= Data output



= DIN



## 1326 DIGI-MET® Pocket calipers for specific measuring tasks

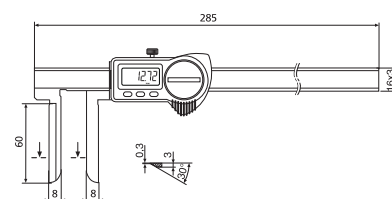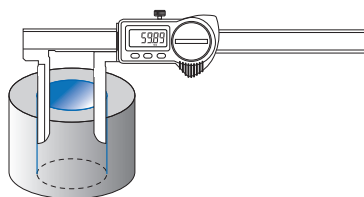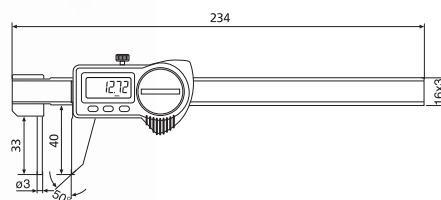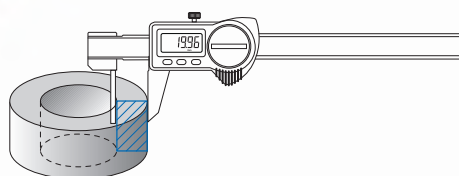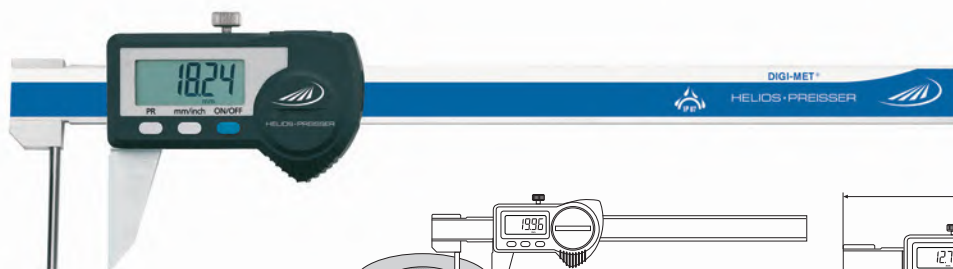

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start
- Quick-Lock (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|   | Measuring range |         | Jaw length |      | Reading |       | Order no. | List price<br>EUR |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|------------|------|---------|-------|-----------|-------------------|
|                                                                                                                                                                         | mm              | inch    | mm         | inch | mm      | inch  |           |                   |
| Wall thickness caliper                                                                                                                                                  |                 |         |            |      |         |       |           |                   |
|                                                                                                                                                                         | 0 - 150         | 0 - 6   | 40         | 1.6  | 0.01    | .0005 | 1326 918  | 503.00            |
| With long cross jaws for inner measurements                                                                                                                             |                 |         |            |      |         |       |           |                   |
|                                                                                                                                                                         | 10 - 200        | 0.4 - 8 | 60         | 2.4  | 0.01    | .0005 | 1326 930  | 653.00            |

### Accessories




| Accessories                           | Order no. | List price<br>EUR |
|---------------------------------------|-----------|-------------------|
| Battery, 3V-Lithium, CR 2032          | 0220 704  | 3.90              |
| Data cable DATA VARIABLE to RS232     | 1997 501  | 50.00             |
| Data cable DATA VARIABLE to digimatic | 1998 501  | 64.00             |
| Data cable DATA VARIABLE to USB       | 1998 720  | 72.00             |





## 1326 DIGI-MET® Pocket calipers for specific measuring tasks

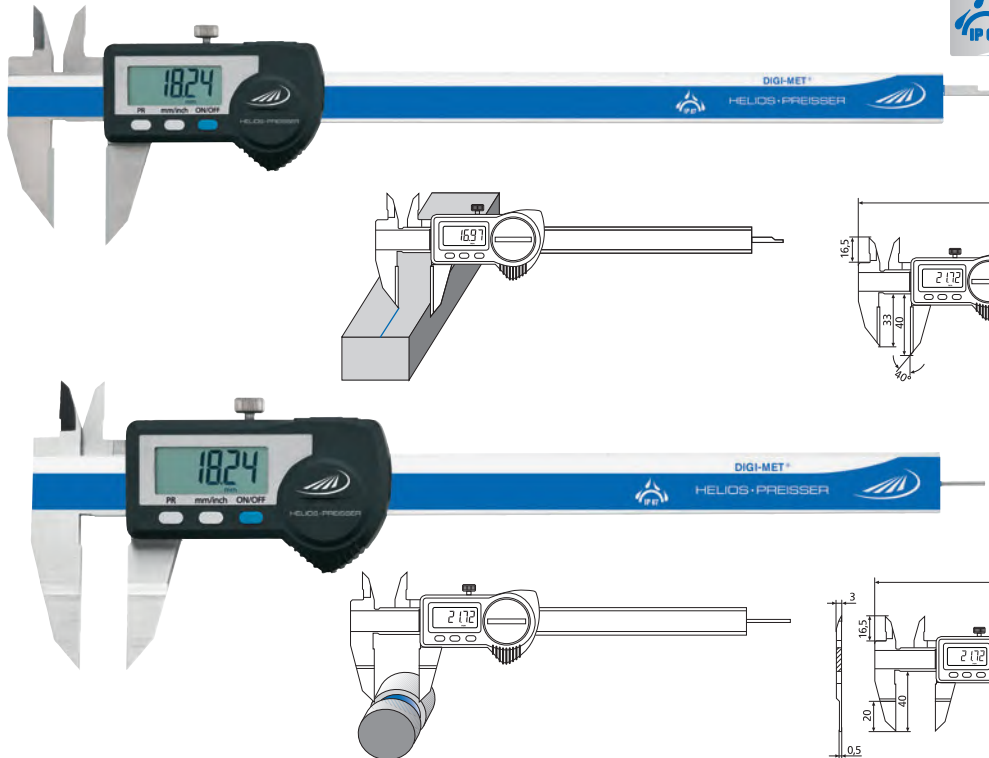

1

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  | Measuring range |       | Jaw length |      | Reading |       | Depth gauge | Order no. | List price<br>EUR |
|-------------------------------------------------------------------------------------|-----------------|-------|------------|------|---------|-------|-------------|-----------|-------------------|
|                                                                                     | mm              | inch  | mm         | inch | mm      | inch  |             |           |                   |
| Scribing caliper with carbide-tipped outer measuring surfaces                       |                 |       |            |      |         |       |             |           |                   |
|                                                                                     | 0 - 200         | 0 - 8 | 33         | 1.3  | 0.01    | .0005 | rectangular | 1326 912  | 320.00            |
| With flat measuring surfaces e.g. for outer recesses                                |                 |       |            |      |         |       |             |           |                   |
|                                                                                     | 0 - 150         | 0 - 6 | 40         | 1.6  | 0.01    | .0005 | round 1.5   | 1326 920  | 545.00            |

### Accessories



1998720

1997501

1998501

Battery, 3V-Lithium, CR 2032

Data cable DATA VARIABLE to RS232

Data cable DATA VARIABLE to digimatic

Data cable DATA VARIABLE to USB

### Order no.

### List price EUR

0220 704

1997 501

1998 501

1998 720

3.90





50.00

64.00

72.00



## 1326 DIGI-MET® Pocket calipers for specific measuring tasks

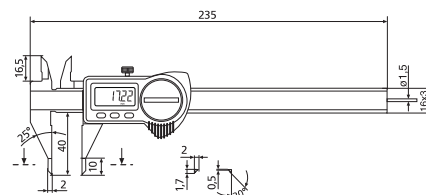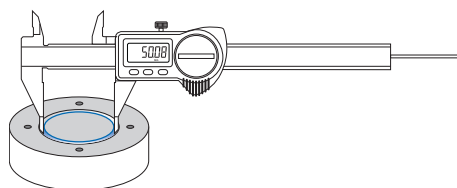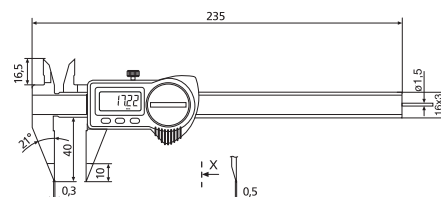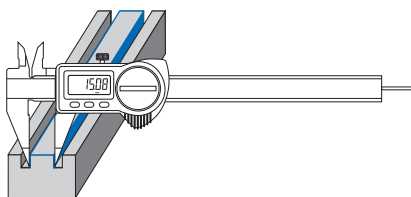

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  |  | Measuring range |       | Jaw length |      | Reading |       | Order no. | List price<br>EUR |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|-------|------------|------|---------|-------|-----------|-------------------|
|                                                                                     |                                                                                     | mm              | inch  | mm         | inch | mm      | inch  |           |                   |
| With pointed jaws                                                                   |                                                                                     |                 |       |            |      |         |       |           |                   |
|                                                                                     |                                                                                     | 0 - 150         | 0 - 6 | 40         | 1.6  | 0.01    | .0005 | 1326 916  | 396.00            |
| With fine measuring tips                                                            |                                                                                     |                 |       |            |      |         |       |           |                   |
|                                                                                     |                                                                                     | 0 - 150         | 0 - 6 | 40         | 1.6  | 0.01    | .0005 | 1326 922  | 447.00            |



1998720

1998501

1997501

### Accessories

- Battery, 3V-Lithium, CR 2032
- Data cable DATA VARIABLE to RS232
- Data cable DATA VARIABLE to digimatic
- Data cable DATA VARIABLE to USB

### Order no.

### List price EUR

0220 704

3.90

1997 501

50.00

1998 501


64.00

1998 720

72.00



## 1326 DIGI-MET® Pocket calipers for specific measuring tasks

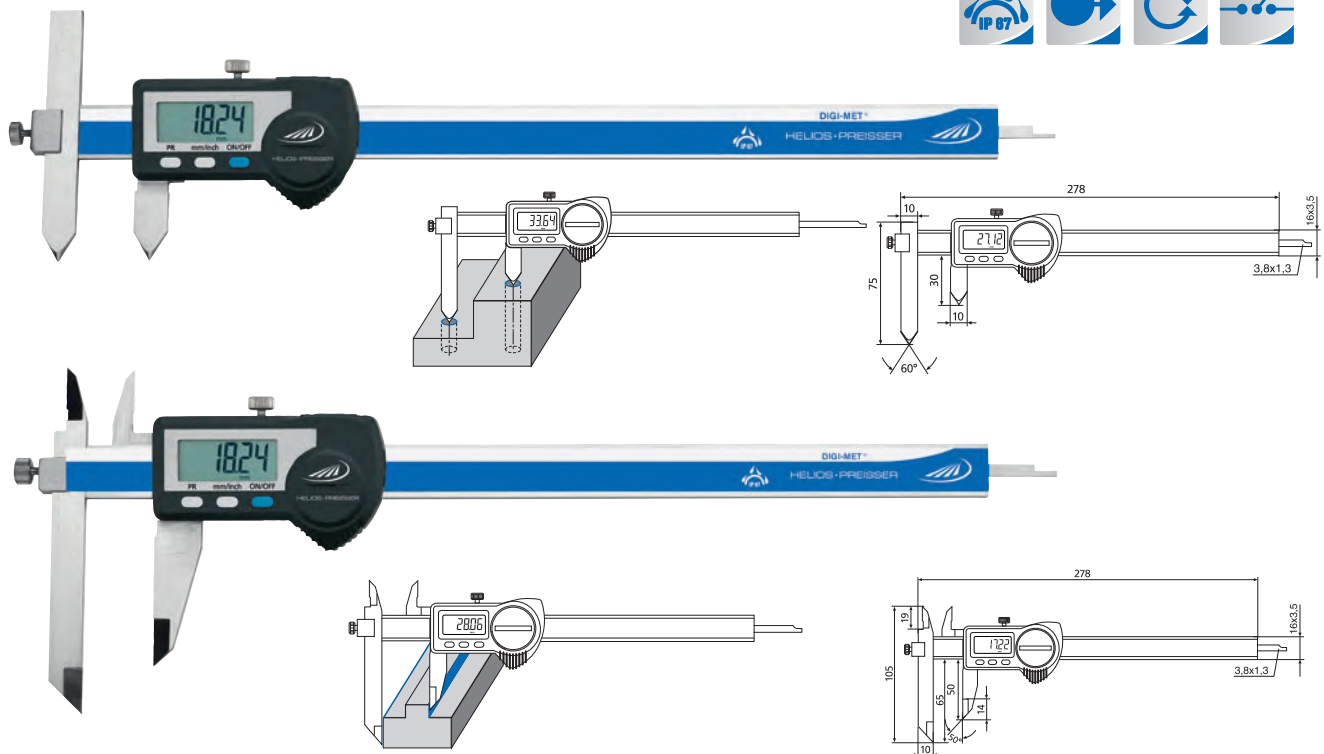

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start
- Quick-Lock (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  | Measuring range |           | Jaw length |      | Reading |       | Order no. | List price<br>EUR |
|-------------------------------------------------------------------------------------|-----------------|-----------|------------|------|---------|-------|-----------|-------------------|
|                                                                                     | mm              | inch      | mm         | inch | mm      | inch  |           |                   |
| Moving jaws for measuring the distance between bores                                |                 |           |            |      |         |       |           |                   |
|                                                                                     | 10 - 210        | 0.4 - 8.3 | 75         | 3.0  | 0.01    | .0005 | 1326 924  | 443.00            |
| Moving jaws + cross tips                                                            |                 |           |            |      |         |       |           |                   |
|                                                                                     | 0 - 200         | 0 - 8     | 65         | 2.5  | 0.01    | .0005 | 1326 928  | 476.00            |







### Accessories

|                                       | Order no. | List price<br>EUR |
|---------------------------------------|-----------|-------------------|
| Battery, 3V-Lithium, CR 2032          | 0220 704  | 3.90              |
| Data cable DATA VARIABLE to RS232     | 1997 501  | 50.00             |
| Data cable DATA VARIABLE to digimatic | 1998 501  | 64.00             |
| Data cable DATA VARIABLE to USB       | 1998 720  | 72.00             |



## 1326 DIGI-MET® Pocket calipers for specific measuring tasks

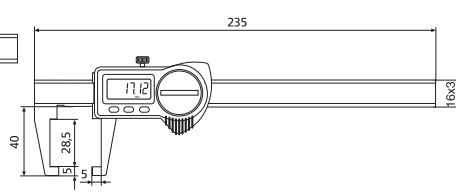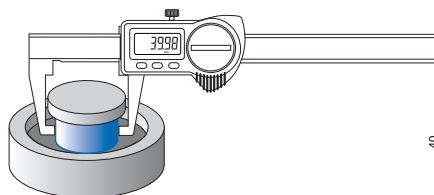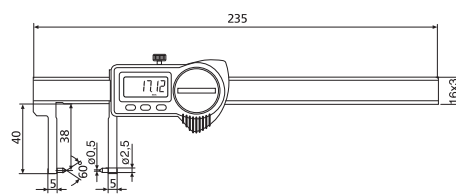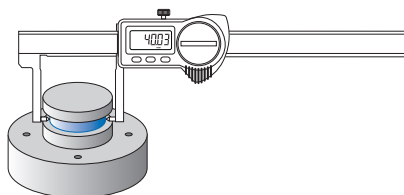

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start
- Quick-Lock (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  |  | Measuring range |       | Jaw length |      | Reading |       | Order no. | List price<br>EUR |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|-------|------------|------|---------|-------|-----------|-------------------|
|                                                                                     |                                                                                     | mm              | inch  | mm         | inch | mm      | inch  |           |                   |
| Measuring tips angled inwards                                                       |                                                                                     |                 |       |            |      |         |       |           |                   |
|                                                                                     |                                                                                     | 0 - 150         | 0 - 6 | 40         | 1.6  | 0.01    | .0005 | 1326 904  | 573.00            |
| Measuring jaws angled inwards                                                       |                                                                                     |                 |       |            |      |         |       |           |                   |
|                                                                                     |                                                                                     | 0 - 150         | 0 - 6 | 40         | 1.6  | 0.01    | .0005 | 1326 908  | 489.00            |

### Accessories



1998720

1997501

1998501

Battery, 3V-Lithium, CR 2032

data cable DATA VARIABLE to RS232

data cable DATA VARIABLE to digimatic

data cable DATA VARIABLE to USB

### Order no.

0220 704

1997 501

1998 501

1998 720

### List price EUR

3.90


50.00

64.00

72.00



## 1326 DIGI-MET® Pocket calipers for specific measuring tasks

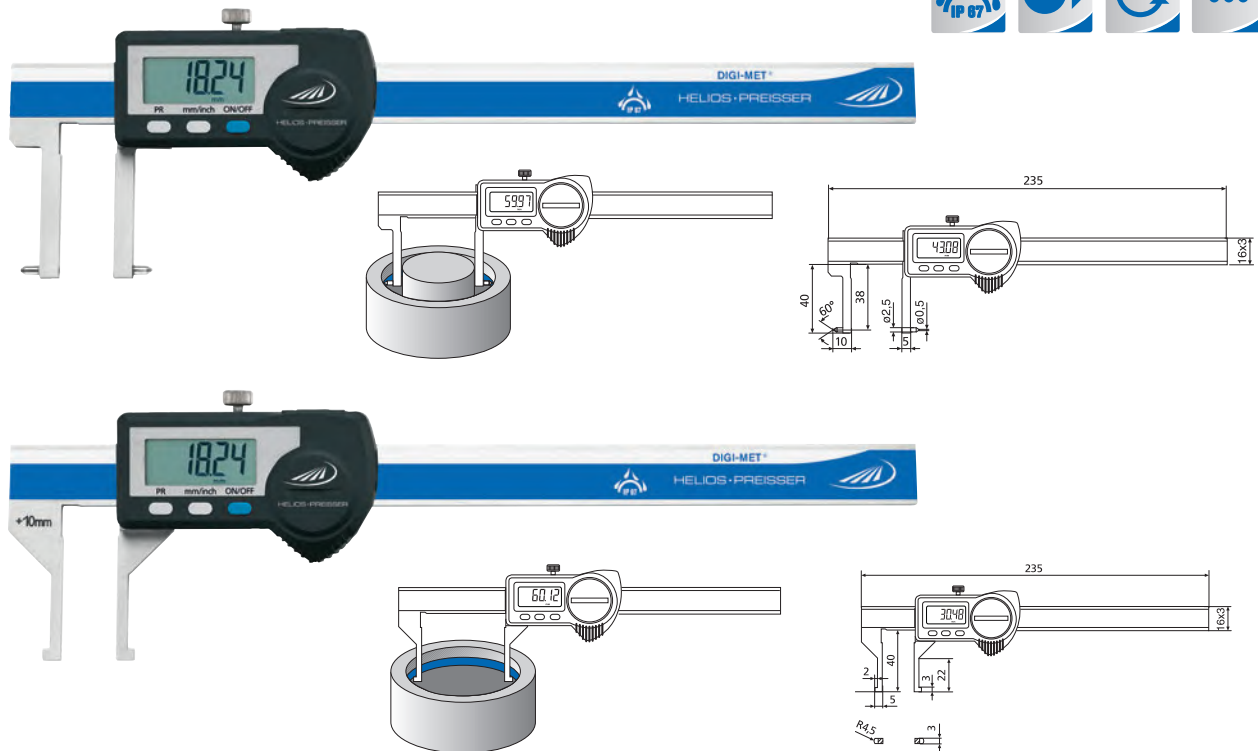

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start
- Quick-Lock (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  | Measuring range |           | Jaw length |      | Reading |       | Order no. | List price<br>EUR |
|-------------------------------------------------------------------------------------|-----------------|-----------|------------|------|---------|-------|-----------|-------------------|
|                                                                                     | mm              | inch      | mm         | inch | mm      | inch  |           |                   |
| Measuring tips angled outwards                                                      |                 |           |            |      |         |       |           |                   |
|                                                                                     | 20.5 - 170      | 0.8 - 6.7 | 40         | 1.6  | 0.01    | .0005 | 1326 906  | 568.00            |
| Measuring jaws angled outwards                                                      |                 |           |            |      |         |       |           |                   |
|                                                                                     | 10.5 - 160      | 0.4 - 6.3 | 40         | 1.6  | 0.01    | .0005 | 1326 910  | 562.00            |

### Accessories



1998720

1997501

1998501

Battery, 3V-Lithium, CR 2032

Data cable DATA VARIABLE to RS232

Data cable DATA VARIABLE to digimatic

Data cable DATA VARIABLE to USB

### Order no.

0220 704

1997 501

1998 501

1998 720

### List price EUR

3.90

50.00

64.00


72.00



## 1330 / 1331 DIGI-MET® Workshop calipers



1330 522

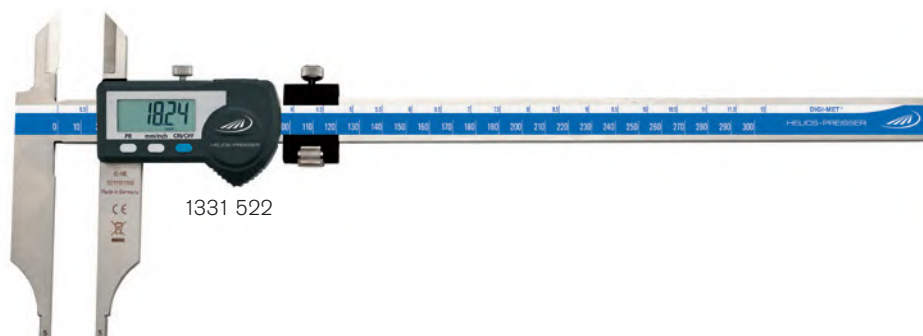

1331 522

### Model

- Stainless steel
- Inductive measuring system, resistant to damp and sweat
- DIN 862
- Knife points
- LCD display:
  - 10 mm with measuring range 300 mm;
  - 12.5 mm from measuring range 500 mm
- Locking screw

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  |  | Measuring range |        | Jaw length |      | Reading |       | Stepped jaws | Error limit | Order no. | List price |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|------------|------|---------|-------|--------------|-------------|-----------|------------|
|                                                                                     |                                                                                     | mm              | inch   | mm         | inch | mm      | inch  | mm           | mm          |           | EUR        |
| With knife points, without fine adjustment                                          |                                                                                     |                 |        |            |      |         |       |              |             |           |            |
| ▪                                                                                   |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 10           | 0.03        | 1330 522  | 398.00     |
| ▪                                                                                   |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 20           | 0.03        | 1330 528  | 607.00     |
| ▪                                                                                   |                                                                                     | 0 - 800         | 0 - 31 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1330 532  | 992.00     |
| ▪                                                                                   |                                                                                     | 0 - 1000        | 0 - 39 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1330 534  | 1200.00    |
| With knife points, with fine adjustment                                             |                                                                                     |                 |        |            |      |         |       |              |             |           |            |
| ▪                                                                                   |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 10           | 0.03        | 1331 522  | 462.00     |
| ▪                                                                                   |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 20           | 0.03        | 1331 528  | 681.00     |
| ▪                                                                                   |                                                                                     | 0 - 800         | 0 - 31 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1331 532  | 1049.00    |
| ▪                                                                                   |                                                                                     | 0 - 1000        | 0 - 39 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1331 534  | 1206.00    |

### Accessories



1998720

1997501

1998501

|                                       |          |       |
|---------------------------------------|----------|-------|
| Battery, 3V-Lithium, CR 2032          | 0220 704 | 3.90  |
| Data cable DATA VARIABLE to USB       | 1998 720 | 72.00 |
| Data cable DATA VARIABLE to RS232     | 1997 501 | 50.00 |
| Data cable DATA VARIABLE to Digimatic | 1998 501 | 64.00 |

### Order no.

### List price EUR





## 1334 / 1335 DIGI-MET® Workshop calipers



### Model

- Stainless steel
- Inductive measuring system, resistant to damp and sweat
- DIN 862
- LCD display:
- 10 mm with measuring range 300 mm;
- 12.5 mm from measuring range 500 mm
- Locking screw

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  |  | Measuring range |        | Jaw length |      | Reading |       | Stepped jaws | Error limit | Order no. | List price |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|------------|------|---------|-------|--------------|-------------|-----------|------------|
|                                                                                     |                                                                                     | mm              | inch   | mm         | inch | mm      | inch  |              |             |           |            |
| Without fine adjustment                                                             |                                                                                     |                 |        |            |      |         |       |              |             |           |            |
| ▪                                                                                   |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 10           | 0.03        | 1334 522  | 369.00     |
| ▪                                                                                   |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 20           | 0.03        | 1334 528  | 518.00     |
| ▪                                                                                   |                                                                                     | 0 - 800         | 0 - 31 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1334 532  | 905.00     |
| ▪                                                                                   |                                                                                     | 0 - 1000        | 0 - 39 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1334 534  | 1071.00    |
| With fine adjustment                                                                |                                                                                     |                 |        |            |      |         |       |              |             |           |            |
| ▪                                                                                   |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 10           | 0.03        | 1335 522  | 422.00     |
| ▪                                                                                   |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 20           | 0.03        | 1335 528  | 596.00     |
| ▪                                                                                   |                                                                                     | 0 - 800         | 0 - 31 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1335 532  | 973.00     |
| ▪                                                                                   |                                                                                     | 0 - 1000        | 0 - 39 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1335 534  | 1118.00    |



### Accessories

- Battery, 3V-Lithium, CR 2032
- Data cable DATA VARIABLE to USB
- Data cable DATA VARIABLE to RS232
- Data cable DATA VARIABLE to Digimatic

### Order no.


### List price

EUR

|          |       |
|----------|-------|
| 0220 704 | 3.90  |
| 1998 720 | 72.00 |
| 1997 501 | 50.00 |
| 1998 501 | 64.00 |



## 1340 / 1341 DIGI-MET® Workshop calipers IP65

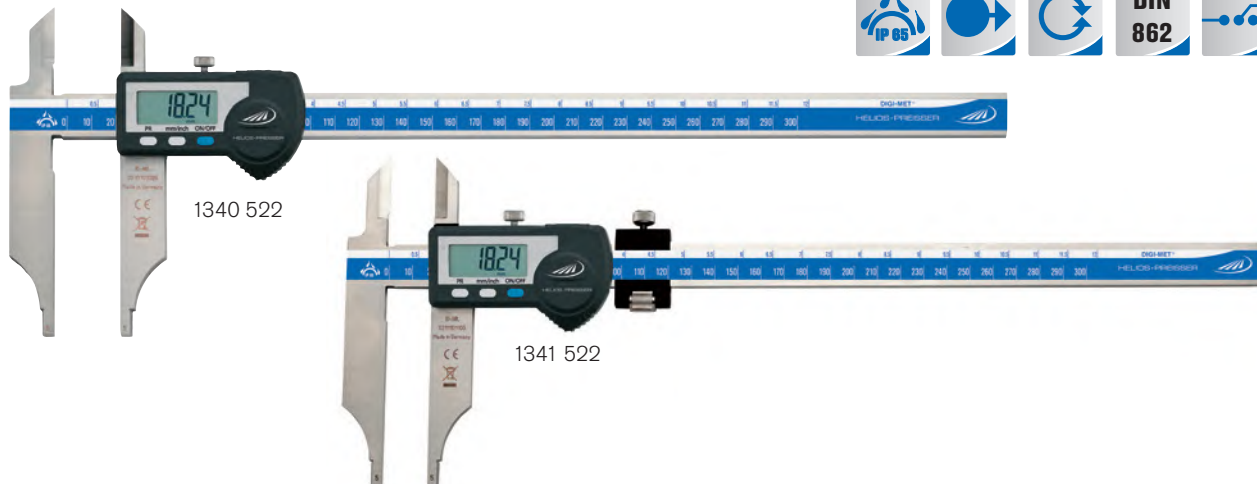

### Model

- Stainless steel
- Inductive measuring system, protection class IP65
- DIN 862
- Knife points
- LCD display:
  - 10 mm with measuring range 300 mm;
  - 12.5 mm from measuring range 500 mm
- Locking screw

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  |  | Measuring range |        | Jaw length |      | Reading |       | Stepped jaws | Error limit | Order no. | List price<br>EUR |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|------------|------|---------|-------|--------------|-------------|-----------|-------------------|
|                                                                                     |                                                                                     | mm              | inch   | mm         | inch | mm      | inch  |              |             |           |                   |
| With knife points, without fine adjustment                                          |                                                                                     |                 |        |            |      |         |       |              |             |           |                   |
| ▪                                                                                   |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 10           | 0.03        | 1340 522  | 431.00            |
| ▪                                                                                   |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 20           | 0.03        | 1340 528  | 822.00            |
| ▪                                                                                   |                                                                                     | 0 - 800         | 0 - 31 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1340 532  | 1110.00           |
| ▪                                                                                   |                                                                                     | 0 - 1000        | 0 - 39 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1340 534  | 1365.00           |
| With knife points, with fine adjustment                                             |                                                                                     |                 |        |            |      |         |       |              |             |           |                   |
| ▪                                                                                   |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 10           | 0.03        | 1341 522  | 488.00            |
| ▪                                                                                   |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 20           | 0.03        | 1341 528  | 878.00            |
| ▪                                                                                   |                                                                                     | 0 - 800         | 0 - 31 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1341 532  | 1165.00           |
| ▪                                                                                   |                                                                                     | 0 - 1000        | 0 - 39 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1341 534  | 1420.00           |



### Accessories

- Battery, 3V-Lithium, CR 2032
- Data cable DATA VARIABLE to USB
- Data cable DATA VARIABLE to RS232
- Data cable DATA VARIABLE to digimatic

### Order no.

### List price EUR

- 0220 704
- 1998 720
- 1997 501
- 1998 501



## 1342 / 1343 DIGI-MET® Workshop calipers IP65



1



### Model

- Stainless steel
- Inductive measuring system, protection class IP65
- DIN 862
- LCD display:
  - 10 mm with measuring range 300 mm;
  - 12.5 mm from measuring range 500 mm
- Locking screw

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  |  | Measuring range |        | Jaw length |      | Reading |       | Stepped jaws | Error limit | Order no. | List price |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|------------|------|---------|-------|--------------|-------------|-----------|------------|
|                                                                                     |                                                                                     | mm              | inch   | mm         | inch | mm      | inch  | mm           | mm          |           | EUR        |
| Without fine adjustment                                                             |                                                                                     |                 |        |            |      |         |       |              |             |           |            |
| ▪                                                                                   |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 10           | 0.03        | 1342 522  | 396.00     |
| ▪                                                                                   |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 20           | 0.03        | 1342 528  | 731.00     |
| ▪                                                                                   |                                                                                     | 0 - 800         | 0 - 31 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1342 532  | 1012.00    |
| ▪                                                                                   |                                                                                     | 0 - 1000        | 0 - 39 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1342 534  | 1259.00    |
| With fine adjustment                                                                |                                                                                     |                 |        |            |      |         |       |              |             |           |            |
| ▪                                                                                   |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 10           | 0.03        | 1343 522  | 452.00     |
| ▪                                                                                   |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 20           | 0.03        | 1343 528  | 788.00     |
| ▪                                                                                   |                                                                                     | 0 - 800         | 0 - 31 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1343 532  | 1068.00    |
| ▪                                                                                   |                                                                                     | 0 - 1000        | 0 - 39 | 150        | 6.0  | 0.01    | .0005 | 20           | 0.04        | 1343 534  | 1314.00    |



### Accessories

- Battery, 3V-Lithium, CR 2032
- Data cable DATA VARIABLE to USB
- Data cable DATA VARIABLE to RS232
- Data cable DATA VARIABLE to digimatic

### Order no.


### List price

EUR

- 0220 704 3.90
- 1998 720 72.00
- 1997 501 50.00
- 1998 501 64.00



## 0222 / 0223 DIGI-MET® Workshop calipers long version

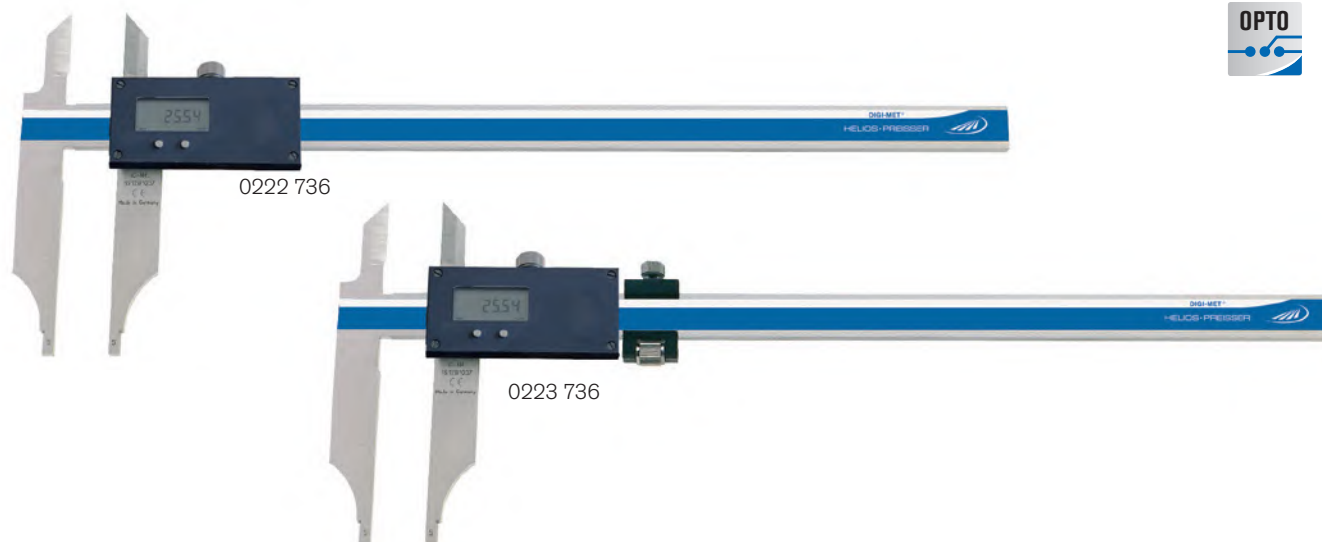

### Model

- Stainless steel
- LCD display 10 mm
- Locking screw
- Knife points
- Factory standard

### Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Hold
- Data output Opto RS 232
- PRESET-Function (setting a numerical value)

### Delivery

- Wooden case

| ✕                                          |  | Measuring range |        | Jaw length |      | Reading |       | Error limit | Order no. | List price |
|--------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|------------|------|---------|-------|-------------|-----------|------------|
|                                            |                                                                                     | mm              | inch   | mm         | inch | mm      | inch  | mm          |           | EUR        |
| With knife points, without fine adjustment |                                                                                     |                 |        |            |      |         |       |             |           |            |
|                                            | ▪                                                                                   | 0 - 1500        | 0 - 59 | 200        | 8.0  | 0.01    | .0005 | 0.1         | 0222 734  | 2677.00    |
|                                            | ▪                                                                                   | 0 - 2000        | 0 - 79 | 200        | 8.0  | 0.01    | .0005 | 0.12        | 0222 736  | 3212.00    |
| With knife points, with fine adjustment    |                                                                                     |                 |        |            |      |         |       |             |           |            |
|                                            | ▪                                                                                   | 0 - 1500        | 0 - 59 | 200        | 8.0  | 0.01    | .0005 | 0.1         | 0223 734  | 2856.00    |
|                                            | ▪                                                                                   | 0 - 2000        | 0 - 79 | 200        | 8.0  | 0.01    | .0005 | 0.12        | 0223 736  | 3309.00    |



### Accessories

|                              | Order no. | List price<br>EUR |
|------------------------------|-----------|-------------------|
| Battery, 3V-Lithium, CR 2032 | 0220 704  | 3.90              |
| Data cable opto to RS232     | 0996 701  | 77.00             |
| Data cable opto to USB       | 0996 705  | 147.00            |
| USB-keyboard interface cable | 0997 770  | 251.00            |



# HELIOS • PREISSER

## 0224 / 0225 DIGI-MET® Workshop calipers long version



1



0224 736



0225 736

### Model

- Stainless steel
- LCD display 10 mm
- Locking screw
- Without knife points
- Factory standard

### Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Hold
- Data output Opto RS 232
- PRESET-Function (setting a numerical value)

### Delivery

- Wooden case

|  |  | Measuring range |        | Jaw length |      | Reading |       | Error limit | Order no. | List price |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|------------|------|---------|-------|-------------|-----------|------------|
|                                                                                     |                                                                                     | mm              | inch   | mm         | inch | mm      | inch  | mm          |           | EUR        |
| Without fine adjustment                                                             |                                                                                     |                 |        |            |      |         |       |             |           |            |
|                                                                                     | ▪                                                                                   | 0 - 1500        | 0 - 59 | 200        | 8.0  | 0.01    | .0005 | 0.1         | 0224 734  | 2421.00    |
|                                                                                     | ▪                                                                                   | 0 - 2000        | 0 - 79 | 200        | 8.0  | 0.01    | .0005 | 0.12        | 0224 736  | 2934.00    |
| With fine adjustment                                                                |                                                                                     |                 |        |            |      |         |       |             |           |            |
|                                                                                     | ▪                                                                                   | 0 - 1500        | 0 - 59 | 200        | 8.0  | 0.01    | .0005 | 0.1         | 0225 734  | 2552.00    |
|                                                                                     | ▪                                                                                   | 0 - 2000        | 0 - 79 | 200        | 8.0  | 0.01    | .0005 | 0.12        | 0225 736  | 3029.00    |



0996705

0996701

0997770

### Accessories


|                              | Order no. | List price<br>EUR |
|------------------------------|-----------|-------------------|
| Battery, 3V-Lithium, CR 2032 | 0220 704  | 3.90              |
| Data cable opto to RS232     | 0996 701  | 77.00             |
| Data cable opto to USB       | 0996 705  | 147.00            |
| USB-keyboard interface cable | 0997 770  | 251.00            |



## 1351 DIGI-MET® Workshop calipers with cross points



1351 522

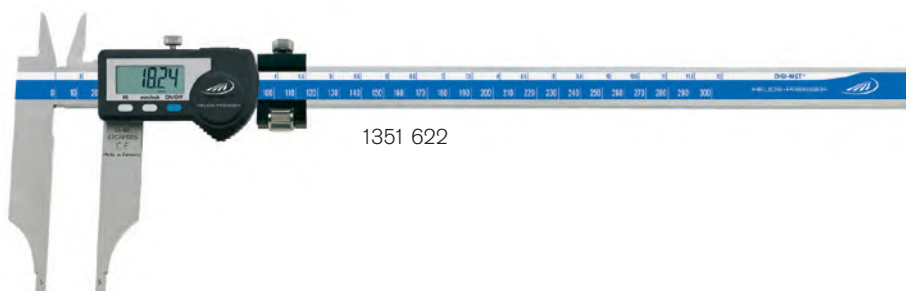

1351 622

### Model

- Stainless steel
- DIN 862
- Protection class IP65
- LCD display
- 10 mm with measuring range 300 mm;
- 12.5 mm from measuring range 500 mm
- Locking screw
- Inside cross points
- Three way measurement

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  |  | Measuring range |        | Jaw length |      | Reading |       | Error limit | Order no. | List price |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|------------|------|---------|-------|-------------|-----------|------------|
|                                                                                     |                                                                                     | mm              | inch   | mm         | inch | mm      | inch  | mm          |           | EUR        |
| Without fine adjustment                                                             |                                                                                     |                 |        |            |      |         |       |             |           |            |
|                                                                                     |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 0.03        | 1351 522  | 554.00     |
|                                                                                     |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 0.03        | 1351 528  | 717.00     |
| With fine adjustment                                                                |                                                                                     |                 |        |            |      |         |       |             |           |            |
|                                                                                     |                                                                                     | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 0.03        | 1351 622  | 591.00     |
|                                                                                     |                                                                                     | 0 - 500         | 0 - 20 | 125        | 5.0  | 0.01    | .0005 | 0.03        | 1351 628  | 784.00     |



1998720



1997501



1998501

### Accessories

|                                       | Order no. | List price<br>EUR |
|---------------------------------------|-----------|-------------------|
| Battery, 3V-Lithium, CR 2032          | 0220 704  | 3.90              |
| Data cable DATA VARIABLE to USB       | 1998 720  | 72.00             |
| Data cable DATA VARIABLE to digimatic | 1998 501  | 64.00             |
| Data cable DATA VARIABLE to RS232     | 1997 501  | 50.00             |







## 1338 DIGI-MET® Workshop caliper PRISMA



1

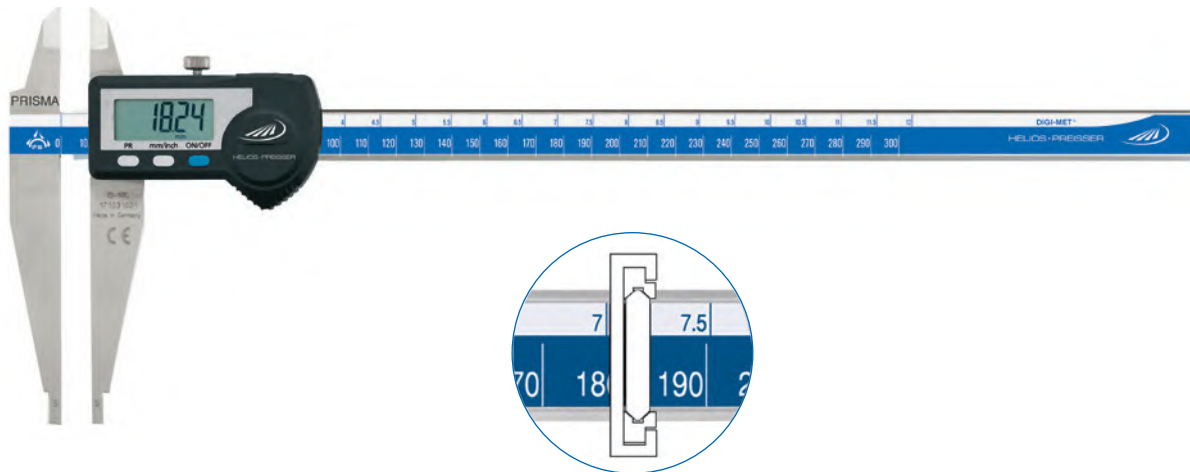

### Model

- Double prisma guide with excellent sliding characteristics
- Stainless steel
- Accuracy in accordance to DIN 862
- Protection class IP65
- LCD display 10 mm
- Locking screw
- Knife points
- Stepped jaws for inside measurement 10 mm

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|   | Measuring range |        | Jaw length |      | Reading |       | Error limit | Order no. | List price |
|---|-----------------|--------|------------|------|---------|-------|-------------|-----------|------------|
|   | mm              | inch   | mm         | inch | mm      | inch  | mm          |           | EUR        |
| ▪ | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 0.03        | 1338 522  | 475.00     |



1998720

1997501


1998501

### Accessories

|                                       | Order no. | List price<br>EUR |
|---------------------------------------|-----------|-------------------|
| Battery, 3V-Lithium, CR 2032          | 0220 704  | 3.90              |
| Data cable DATA VARIABLE to RS232     | 1997 501  | 50.00             |
| Data cable DATA VARIABLE to digimatic | 1998 501  | 64.00             |
| Data cable DATA VARIABLE to USB       | 1998 720  | 72.00             |



## 0228 DIGI-MET® Workshop calipers lightweight

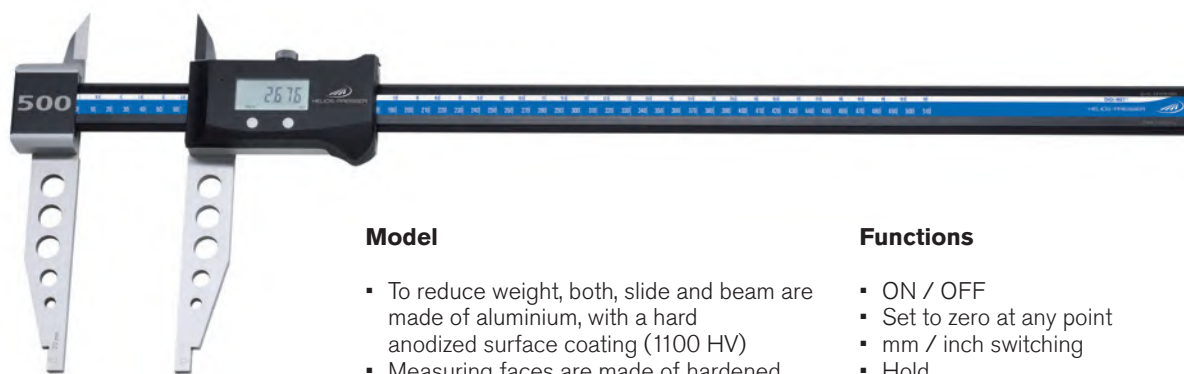

### Model

- To reduce weight, both, slide and beam are made of aluminium, with a hard anodized surface coating (1100 HV)
- Measuring faces are made of hardened stainless steel
- Factory standard
- Smooth movement due to the double V-guide
- LCD display
- Locking screw
- Knife points

### Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Hold
- PRESET-Function (setting a numerical value)

### Delivery

- Wooden case

|  |   | Measuring range |        | Jaw length |      | Reading |       | Error limit | Order no. | List price |
|--|---|-----------------|--------|------------|------|---------|-------|-------------|-----------|------------|
|  |   | mm              | inch   | mm         | inch | mm      | inch  | mm          |           | EUR        |
|  |   | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 0.03        | 0228 701  | 493.00     |
|  |   | 0 - 500         | 0 - 20 | 150        | 6.0  | 0.01    | .0005 | 0.03        | 0228 702  | 686.00     |
|  |   | 0 - 800         | 0 - 31 | 150        | 6.0  | 0.01    | .0005 | 0.08        | 0228 703  | 964.00     |
|  |   | 0 - 1000        | 0 - 39 | 150        | 6.0  | 0.01    | .0005 | 0.08        | 0228 704  | 1137.00    |
|  | ▪ | 0 - 1500        | 0 - 59 | 150        | 6.0  | 0.01    | .0005 | 0.1         | 0228 724  | 2869.00    |
|  | ▪ | 0 - 2000        | 0 - 79 | 150        | 6.0  | 0.01    | .0005 | 0.12        | 0228 726  | 3410.00    |

### Accessories


Battery, 3V-Lithium, CR 2032

### Order no.

0220 704

### List price EUR

3.90

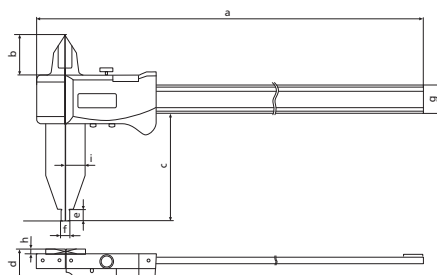


| Measuring range<br>mm | a    | b  | c   | d    | e  | f  | g    | h   | i    |
|-----------------------|------|----|-----|------|----|----|------|-----|------|
| 300                   | 450  | 33 | 90  | 24.5 | 10 | 10 | 25.0 | 4.5 | 17.0 |
| 500                   | 726  | 42 | 150 | 33.5 | 15 | 20 | 31.9 | 6.0 | 29.0 |
| 800                   | 1026 | 42 | 150 | 33.5 | 15 | 20 | 31.9 | 6.0 | 29.0 |
| 1000                  | 1226 | 42 | 150 | 33.5 | 15 | 20 | 31.9 | 6.0 | 29.0 |
| 1500                  | 1726 | 42 | 150 | 33.5 | 15 | 20 | 31.9 | 6.0 | 29.0 |
| 2000                  | 2226 | 42 | 150 | 33.5 | 15 | 20 | 31.9 | 6.0 | 29.0 |



## 1351 DIGI-MET® Caliper with cross points



1

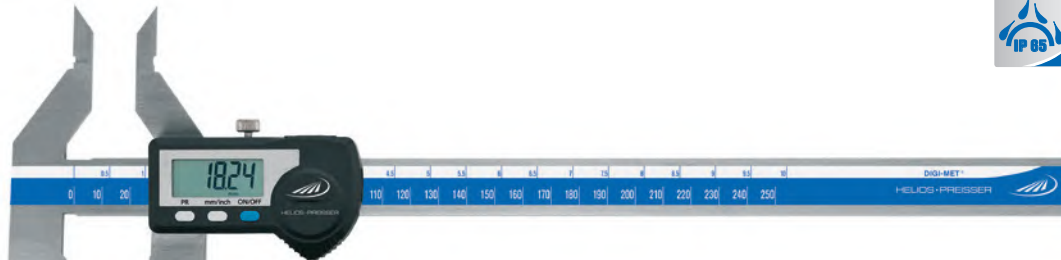

### Model

- Stainless steel
- LCD display 10 mm
- Protection class IP65
- Factory standard
- Locking screw
- Inside cross points 55 mm

### Functions


- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  | Measuring range |        | Jaw length |      | Reading |       | Error limit | Order no. | List price |
|--|-----------------|--------|------------|------|---------|-------|-------------|-----------|------------|
|  | mm              | inch   | mm         | inch | mm      | inch  | mm          |           | EUR        |
|  | 0 - 250         | 0 - 10 | 80         | 3.2  | 0.01    | .0005 | 0.03        | 1351 920  | 499.00     |

## 1354 DIGI-MET® Caliper with gripper points

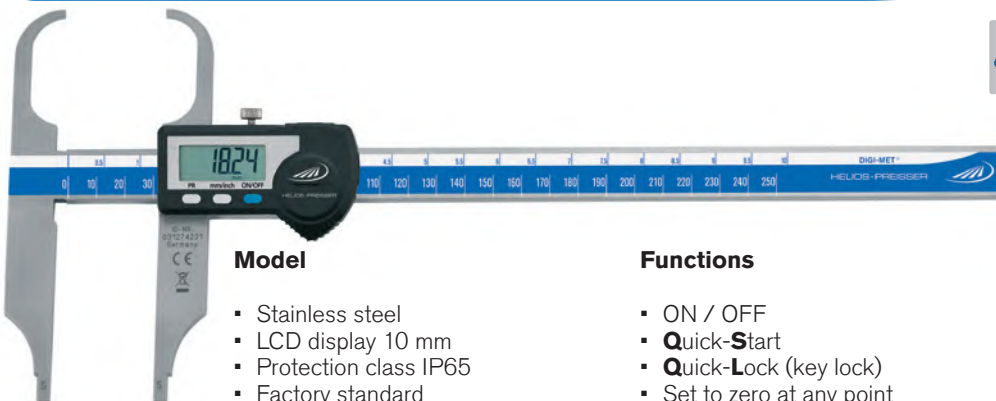

### Model

- Stainless steel
- LCD display 10 mm
- Protection class IP65
- Factory standard
- Locking screw
- Gripper points 55 mm

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- Hold
- PRESET-Function (setting a numerical value)

- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

|  | Measuring range |        | Jaw length |      | Reading |       | Error limit | Order no. | List price |
|--|-----------------|--------|------------|------|---------|-------|-------------|-----------|------------|
|  | mm              | inch   | mm         | inch | mm      | inch  | mm          |           | EUR        |
|  | 0 - 250         | 0 - 10 | 75         | 3.0  | 0.01    | .0005 | 0.03        | 1354 520  | 590.00     |



1998720

1997501

1998501

### Accessories

- Battery, 3V-Lithium, CR 2032
- Data cable DATA VARIABLE to RS232
- Data cable DATA VARIABLE to digimatic
- Data cable DATA VARIABLE to USB

### Order no.


- 0220 704
- 1997 501
- 1998 501
- 1998 720

### List price

- EUR
- 3.90
- 50.00
- 64.00
- 72.00




## 1348 DIGI-MET® Universal calipers

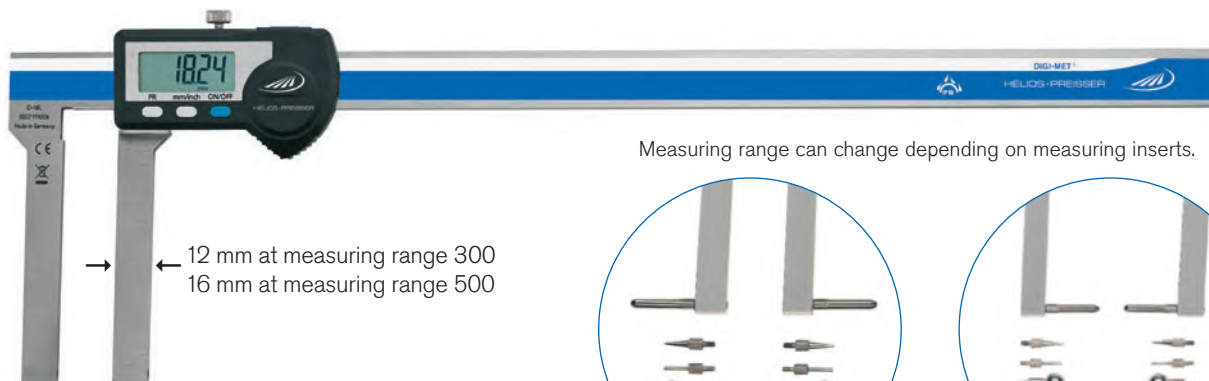


→ 12 mm at measuring range 300  
← 16 mm at measuring range 500

Measuring range can change depending on measuring inserts.



for internal measurements



for external measurements

### Model

- Stainless steel
- Factory standard
- Protection class IP65
- LCD display 10 or 12.5 mm
- Locking screw
- For internal and external measurements
- Individually adaptable on problematic tasks through measuring inserts with thread M 2.5

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden box
- Without measuring inserts  
(correct measuring inserts with thread M 2.5 see pages 137 - 140)

Model „Pocket Talent“ with measuring range 150 mm on page 29

|  | Measuring range |        | Jaw length |      | Reading |       | Error limit | Order no. | List price |
|--|-----------------|--------|------------|------|---------|-------|-------------|-----------|------------|
|  | mm              | inch   | mm         | inch | mm      | inch  | mm          |           | EUR        |
|  | 0 - 300         | 0 - 12 | 90         | 3.5  | 0.01    | .0005 | 0.06        | 1348 722  | 607.00     |
|  | 0 - 500         | 0 - 20 | 100        | 4.0  | 0.01    | .0005 | 0.06        | 1348 728  | 778.00     |



1998720

1998501

1997501

### Accessories

- Battery, 3V-Lithium, CR 2032
- Data cable DATA VARIABLE to RS232
- Data cable DATA VARIABLE to digimatic
- Data cable DATA VARIABLE to USB

### Order no.

### List price EUR

- 0220 704
- 1997 501
- 1998 501
- 1998 720

- 3.90
- 50.00
- 64.00
- 72.00