


Stainless Steel Self Tapping Screws - Philips Head



Code	Description	Price
STS39-25	ST3.9 x 25mm SS Self Tap Screws - Pk 25	6.00
STS42-32	ST4.2 x 32mm SS Self Tap Screws - Pk 25	7.50
STS48-38	ST4.8 x 38mm SS Self Tap Screws - Pk 25	9.00
STS55-45	ST5.5 x 45mm SS Self Tap Screws - Pk 25	14.00
STS63-50	ST6.3 x 50mm SS Self Tap Screws - Pk 25	22.00

Other sizes can be supplied, please call with your specification

Rubber "O" Rings

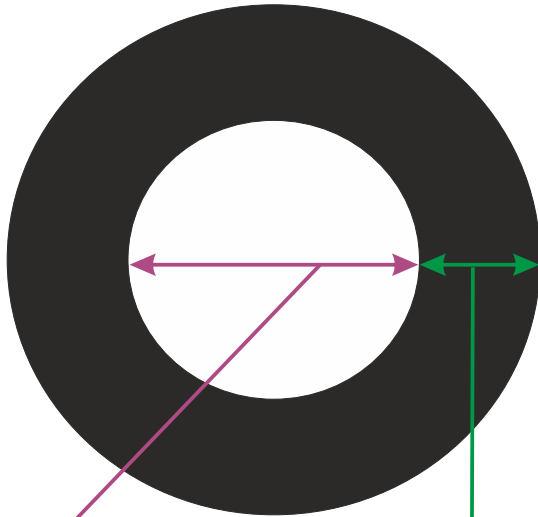

Internal dia. mm x Cross sectional dia. mm

Code	Description	Price
OR-NBR-63	O Ring (Nitrile) 6mm x 3mm	0.20
OR-NBR-2025	O Ring (Nitrile) 20mm x 2.5mm	0.25
OR-NBR-2951533	O Ring (Nitrile) 29.51mm x 5.33mm	0.50
OR-NBR-322	O Ring (Nitrile) 32mm x 2mm	1.00
OR-NBR-455	O Ring (Nitrile) 45mm x 5mm	1.50
OR-NBR-5039353	O Ring (Nitrile) 50.39mm x 3.53mm	2.50
OR-NBR-5525	O Ring (Nitrile) 55mm x 2.5mm	3.00
OR-NBR-976	O Ring (Nitrile) 97mm x 6mm	4.00
OR-NBR-1406	O Ring (Nitrile) 140mm x 6mm	10.00
OR-NBR-15510	O Ring (Nitrile) 155mm x 10mm	12.50
OR-NBR-169357	O Ring (Nitrile) 169.3mm x 5.7mm	12.50
OR-NBR-24565	O Ring (Nitrile) 245mm x 6.5mm	12.50
OR-NBR-2458	O Ring (Nitrile) 245mm x 8mm	17.50
OR-NBR-24510	O Ring (Nitrile) 245mm x 10mm	19.50
OR-NBR-34310	O Ring (Nitrile) 343mm x 10mm	22.50

VITON (FPM) Rubber:

OR-VTN-1525	O Ring (Viton) 15mm x 2.5mm	0.50
-------------	-----------------------------	------

Rubber "O" Ring Cord per metre



Code	Description	Price/m
OR-NBR05	O Ring Cord (Nitrile) 5mm	3.00
OR-NBR06	O Ring Cord (Nitrile) 6mm	3.50
OR-NBR07	O Ring Cord (Nitrile) 7mm	4.00
OR-NBR08	O Ring Cord (Nitrile) 8mm	5.00
OR-NBR10	O Ring Cord (Nitrile) 10mm	7.00
OR-NBR12	O Ring Cord (Nitrile) 12mm	9.00

Lubricant & 'O' Ring Kits



M13 ML05 MIYOK ORSK

Code	Description	Price
M13	Silicone Spray Lubricant 400ml	14.00
SG100	Silicone Grease - 100ml tub	9.00
ML05	Magic Lube - 5oz	12.45
ORSK	"O" Ring Service Kit - NBR O Rings from 2 x 3mm to 4 x 44mm - Approx 350	30.00
MIYOK	"Make it Yourself" 'O' Ring Kit 2 metres each sized rubber cord, splice, tape measure, knife and glue. 14 thicknesses from 1.78mm to 8mm dia.	55.00

Strap Wrenches for tightening pipe fittings



BOA01 BOA02



Code	Description	Price
BOA01	Baby Boa Strap Wrench	9.00
BOA02	Standard Boa Strap Wrench	13.00
BOA03	Boa <u>Strap only</u> (for BOA02)	8.00

PIPEWORK & FITTINGS

PIPE REPAIR & MARKING

“Pipe Mate” - Connection Recovery

Code	Description	Price
CP15PM	1.5" Pipe Mate	2.34
CP2PM	2" Pipe Mate	3.26

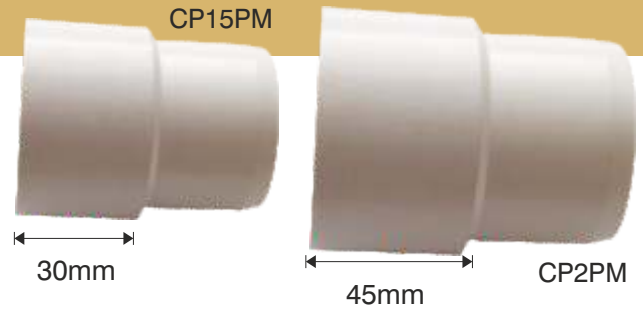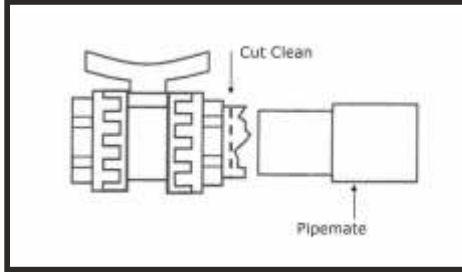

Designed for an emergency repair, where the pipe may have been damaged and there is insufficient pipe left for you to connect using a plain socket.

The “Pipe Mate” can be glued straight into a piece of 1.5" or 2" pipe creating a 30mm (1.5" pipe) or 45mm (2" pipe) length to connect to.

RamBit Plastic Fitting Saver - Pipe Repair Tool

Code	Description	Price
PFS050	0.5" Fitting Saver	23.00
PFS075	3/4" Fitting Saver	25.00
PFS100	1" Fitting Saver	27.00
PFS125	1.25" Fitting Saver	30.00
PFS150	1.5" Fitting Saver	35.00
PFS200	2" Fitting Saver	37.50
PFS300	3" Fitting Saver	45.00



Reams old pipe material out of a broken pipe fitting so that it can be re-used.

Requires a drill with a minimum 12mm size chuck.



Orapi “Quick Wrap” Emergency Pipe Repair

Code	Description	Price
QW	Quick Wrap Repair Bandage 50mm wide x 15 metres	12.00

This moist cure repair bandage enables the user to effect a temporary repair to plastic or metal pipes.

Cures when exposed to atmosphere & heat.



Diversitech “Flexi-Patch” Pipe Repair

Code	Description	Price
FP-36	Flexi-Patch Repair Bandage	29.50
UV-TORCH	UV Hand Held Torch/Lamp 51 LEDs - approx 395nm wavelength	25.00

Flexi-Patch is an easy to use flexible repair patch ideal for repairing almost any surface. It cures quickly using only UV light from sunlight or a UV torch, for a long lasting, permanent repair.

Flexi-Patch is a glass fibre reinforced polyester ideal for use on PVC, most Plastics, Metal, Wood, Concrete & more. It dries hard for a permanent repair, and can be drilled, tapped & painted when dry.

- * Durable Reinforced Glass Fibre Patch.
- * Flexible and waterproof.
- * Temperature safe -30deg.C to +365deg.C .
- * Will not shrink or expand during or after application.
- * Bonds to all surfaces **EXCEPT polypropylene.**
- * Cures quickly - as fast as 5 minutes.

