

# CHEMICAL DOSING

## CHEMICAL TRANSFER PUMP & FILL VALVES

### Economy Chemical Transfer Pumps

Code	Description	Price
EQPSYP	PP25 Koshin Syphon Pump Economy hand transfer pump for weak acids and alkalis.	32.50
VLHP	Lever Hand Pump - Viton Seals Economy hand transfer pump for aggressive chemicals Adjustable Shaft length Supplied c/w 1 metre 1" RPVC & S/S Hose Clamp	130.00




### Lutz Jesco Electric Transfer Pump

The Lutz B2 Vario Transfer Pump offers features and benefits to meet the needs of the maintenance technician when transferring sodium hypochlorite\*\* and other pool and spa chemicals.

The speed-controllable motor enables small quantities of liquids to be transferred safely and quietly, and the modular construction enables effortless servicing without special tools.

\*\* Polypropylene is only conditionally resistant to sodium hypochlorite.

The pump MUST NOT be left in the fluid when not in use, and the pump MUST be flushed through with clean fresh water after each use.

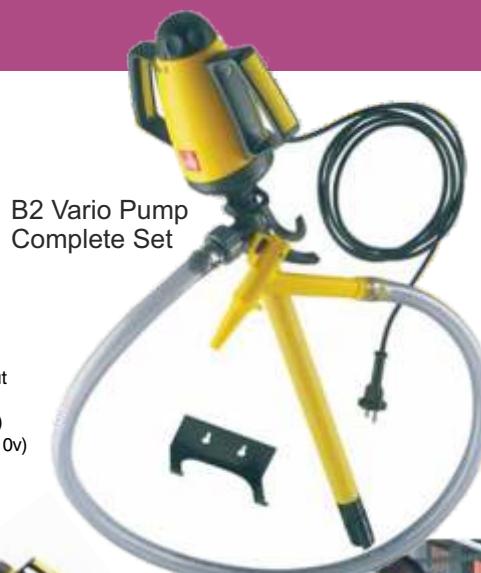

Pump Materials:  
\* Housing: Polypropylene/PVDF  
\* Impeller: Polypropylene  
\* Seals: None  
\* Mechanical Seals: None  
\* Bearing: ETFE#/PTFE  
# ETFE = Ethylene-Tetrafluoroethylene Copolymer  
\* Drive Shaft: Hastelloy C  
All suction tubes are 1000mm long

Specification:  
\* Ultra quiet variable speed motor with safety cut-out  
\* 200w motor (230v), 180w motor (110v)  
\* Delivery Rate: 75l/min (230v), 62l/min (110v)  
\* Delivery Head: 7m head (230v), 5m head (110v)  
\* Viscosity: up to 300 mPas  
\* Temp of Liquid: up to 50degC  
\* Weight: Motor + Suction Tube 2.5kg

Code	Description	Price
Vario-Set230	B2 Vario Pump Complete Set - 230v Pump c/w Lutz-Nozzle, 2 x 3/4" Hose Clips, 1.5 metre 3/4" RPVC Hose & Wall Bracket	645.00
Vario-Set110	B2 Vario Pump Complete Set - 110v Pump c/w Lutz-Nozzle, 2 x 3/4" Hose Clips, 1.5 metre 3/4" RPVC Hose & Wall Bracket	645.00

Spares maybe available by request



### Safety Fill Valve

Code	Description	Price
SFV	Safety Auto Shut-Off Fill Valve Kit c/w 1 metre white semi-rigid plastic fill pipe from valve to day tank, day tank connector & flow valve (15mm cold water supply, compression connections). compression fitting connect.	75.00

Protects from accidental over-filling of day tank!!  
Push action water fill-up valve - allows fill when continually pressed.  
If you release, then valve closes after 15 - 25 seconds.



### Tundish Air Gap Devices

Code	Description	Price
TD1522M	Plastic Tundish 15mm Comp x 22mm Comp	22.00
TD2201	Plastic Tundish 22mm x 1" F/T	22.00
TD3401	Angled Plastic Tundish 3/4" MT x 1" FT	22.00

Tundishes (AA Air Gap Devices) required for compliance with Water Regulations when filling chemical day tanks

