




WATER CLEANING SEPARATORS REDESIGNED

U-15 / NZ-50

NEW INDEPENDENT BEARING SYSTEM

- Extremely robust
- Smooth running even at high sludge loads
- Long bearing life
- Easy maintenance
- Quick access from top
- Accelerator hub for effective 3 μm particle separation

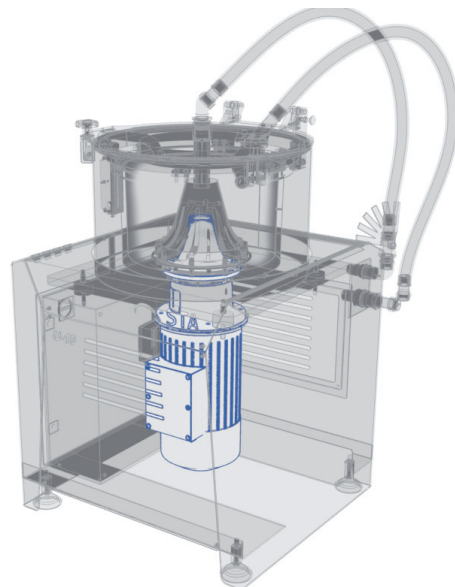

SUSTAINABLE AND ENERGY EFFICIENT

- Full compliance with new EC machinery directive (double-channel speed monitoring)
- IE3 efficiency class motors

SPACE SAVING BASE DESIGN

Control panel fully integrated



SPECIFICATIONS:		U-15	NZ-50
	Power	4 / 5,5 kW	1,5 kW
	Rotor volume	15 l	4,5 l
	Sludge capacity	12 kg	6 kg
	Volume flow	120 / 160 l/min	70 l/min
	Acceleration	1960 x g	950 x g

Separatoren-Technik & Anlagenbau GmbH
Obere Giesswiesen 32
D-78247 Hilzingen (Germany)

Telefon: +49 77 31 92 43 0
Telefax: +49 77 31 92 43 11

www.sta-separator.de
info@sta-separator.de



Centrifugal Liquid Recycling