

WELDAS®

The Professional's Choice



COMFOflex®

STEERSOtuff®

SOFTouch™

DEERSOsoft™

Lava Brown™

Golden Brown™

Yellowjacket®

Fire Fox™

SWEATSOpad®

PYTHONrap™

LAVAshield®

COMBOframe™

WELDAS®

COMFOflex®

Welding Gloves



Cotton Lining




Foam Lining



COMFOflex Lining

SCIENTIFICALLY DESIGNED COMFOflex LINING

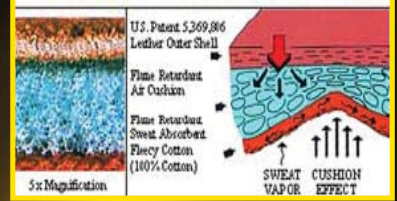

10-2000



S, L, XL, XXL
LH
L/18"



35cm
46cm. (L/18")

- A-grade cow split leather
- Hand **COMFOflex**® lined
- Cuff cotton lined
- Wide body model
- Size L also available in Left Hand only pairs (LH) and 18" (46cm)



95% KEVLAR® 4 ply ∇ + 5 ply ∇

CE **COMFOflex**®

EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002



413X3X



4133



www.weldas.com

Ω Electrostatic Tested Ω

10-2087



L, XL



35cm

- A-grade cow shoulder split leather
- Hand full **COMFOflex**® lined
- Cuff cotton lined
- Wide body model



95% KEVLAR® 3 ply ∇

CE **COMFOflex**®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0001
TÜV 21128415 002



413X3X



4133



www.weldas.com

Ω Electrostatic Tested Ω

10-2900



L, XL



36cm


- A-grade cow split leather
- Hand **COMFOflex**® and wool lined
- Cuff flame retardant lined
- Wide body model



70%

250°C CONTACT

KEVLAR® 4 ply ∇



CE **STEERSOtuff**®

EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002



423X4X



4233




www.weldas.com

WELDAS®

COMFOflex®

Welding Gloves

10-2750



- A-grade cow grain leather
- Backhand **COMFOflex**® lined and cuff cotton lined
- Back palm reversed grain (suède)
- Oil and weather resistant
- Excellent quality and comfortable to wear



30%

250°C CONTACT

KEVLAR® 4 ply



CE **STEERSOtuff**®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0001
TÜV 21128415 002



423X4X



4143



www.weldas.com

Electrostatic Tested

10-2755



- Combined Features:
- On the back of our 10-2385 and the innerhand of the 10-2750 with extra comfort padges
- Oil and weather resistant
- Excellent quality and comfortable to wear



30%

350°C CONTACT

KEVLAR® 4 ply



CE **COMFOflex**®

EN 12477 (09.2005) TYPE A/B
TÜV BP 60022511 0001
TÜV 21136762 003



433X4X




2143



www.weldas.com

10-2385




- A-grade cow side split leather
- Hand full **COMFOflex**® lined and cuff full flame retardant lined
- Wide body model
- Aluminised back is designed to reflect radiant heat and has a layer of split deerskin in between the back and **COMFOflex**® lining



35%

KEVLAR® 4 ply



CE **COMFOflex**®

EN 12477 (09.2005) TYPE A
TÜV BP 60017622 0001
TÜV 21128415 002



41344X



4133



www.weldas.com

WELDAS®

Cotton Lined Welding Gloves

10-2392



L, XL
LH/L, LH/XL
L/18"



34cm
46cm. (L/18")

- < Cow shoulder split leather
- < Full cotton lined
- < Straight thumb helps the user to handle a MIG gun a lot better
- < Size L also available in 18" (46cm)
- < Size L & XL also available in Left Hand only pairs (LH)



95% KEVLAR® 3 ply √

CE

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0002
TÜV 21128415 002



413X4X



3124



www.weldas.com

10-2150



L, XL



36cm

- < Innerhand is made of cow grain leather to make it oil and weather resistant
- < All other parts of the glove are made of cow split leather
- < Full cotton lined



95%

250°C CONTACT

CE

EN 12477 (09.2005) TYPE A/B
TÜV BP 60022511 0001
TÜV 21136762 003



423X4X



2122



www.weldas.com

10-2101



L, XL



34cm

- < The 10-2101 is our general purpose glove of the range
- < Cow shoulder split leather
- < Full cotton lined



90%

CE

EN12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002



413X4X



3134



www.weldas.com

WELDAS®

SOFTouch™

TIG Welding Gloves

10-1003



M, L, XL, XXL



35cm

- < Oil and abrasion resistant
- < Reversed (suède) grain pig leather
- < Seamless index finger

KEVLAR® 3 ply ✓

CE SOFTouch™

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002



413X4X



3121



www.weldas.com

10-1005



S,M, L, XL, XXL



35cm

- < Very smooth and pliable
- < Calfskin grain leather
- < Seamless index finger

KEVLAR® 3 ply ✓

CE SOFTouch™

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0003
TÜV 21128415 002



412X4X



2122



www.weldas.com

Ω Electrostatic Tested Ω

10-1007



M, L, XL



35cm

- < Goatskin palm
- < A-grade cow split leather back and cuff

KEVLAR® 3 ply ✓

CE SOFTouch™

EN 12477 (09.2005) TYPE B
TÜV BP 60017622 0003
TÜV 21128415 002



412X4X



2111



www.weldas.com

WELDAS®

SOFTouch™

TIG Welding Gloves

10-1009



M, L, XL, XXL



35cm

- Hand made of goatskin
- Very soft and excellent feeling
- Cuff made of split cow leather
- Seamless index finger

KEVLAR® 3 ply √

CE SOFTouch™

EN 12477 (09.2005) TYPE B
TÜV BP 60017622 0004
TÜV 21128415 002



412X4X



2111



www.weldas.com

Ω Electrostatic Tested Ω

10-1050



M, L, XL, XXL



32cm

- Outer hand made out of soft black grain cow leather
- White grain goat leather spacers on the sides of the fingers
- Curved cuff made of supple split cow leather, trimmed at the edge with white grain goat leather
- Thin fleecy, flame retardant lining at the back of the hand
- Seamless index finger

KEVLAR® 3 ply √

CE SOFTouch™

EN 12477 (2001 + A1 : 2005)
TYPE A/B
TÜV BP 60042511 0001
TÜV 21177510 001



412X4X



2142



www.weldas.com

10-2304



M, L, XL, XXL



32cm

- Hand made of deerskin
- Very soft feeling
- Cuff made of split cow leather

KEVLAR® 3 ply √

CE DEERSOsoft™

EN 12477 (09.2005) TYPE A/B
TÜV BP 60017622 0004
TÜV 21128415 002



413X4X



2133



www.weldas.com

10-2207



L, XL



25cm

- < Cow split leather
- < Cotton lined
- < Safety cuff

CE

EN 388 (2003)
TÜV BP 60017626 0001
TÜV 21128304 002



3142



www.weldas.com

10-2209



S, M, L, XL, XXL



26cm

- < A-grade cow split leather
- < Cotton lined
- < Rubberised safety cuff

CE

EN 388 (2003)
TÜV BP 60017626 0001
TÜV 21128304 002



3143



www.weldas.com

10-2336



M, L, XL



24cm

- < Palm made of cow grain side leather
- < Back made of split cow leather

CE

EN 388 (2003)
TÜV BP 60017626 0002
TÜV 21128304 002



2111



www.weldas.com

10-2700



S, M, L, XL, XXL



26cm

- < Cow grain side leather of the highest quality
- < Oil and weather resistant

CE



STEERSOtuff®

EN 388 (2003)
TÜV BP 60017626 0002
TÜV 21128304 002



2122




www.weldas.com

Clothing

44-7300 Jacket Full Leather



- < A-grade side split cow leather
- < KEVLAR® 5 ply
- < Leather thickness: min. 1mm

	↕	
44-7300M	76cm	100cm
44-7300L	81cm	112cm
44-7300XL	86cm	124cm
44-7300XXL	91cm	136cm
44-7300XXXL	96cm	148cm
44-7300XXXXL	96cm	160cm



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001




www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-7800 Cape Sleeve



- < A-grade side split cow leather
- < KEVLAR® 5 ply
- < Leather thickness: min. 1mm

	
44-7800M	100cm
44-7800L	112cm
44-7800XL	124cm
44-7800XXL	136cm
44-7800XXXL	148cm



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-78.. Apron for Cape Sleeves



- < A-grade side split cow leather
- < KEVLAR® 5 ply
- < Leather thickness: min. 1mm

	↕	↔
44-7820	51cm	60cm
44-7828	71cm	60cm
44-7836	91cm	60cm
44-7836XL	120cm	80cm



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

Clothing

44-71.. Aprons



44-7124

- < A-grade side split cow leather
- < KEVLAR® 5 ply
- < Leather thickness: min. 1mm
- < Self-balancing strap system

	↕	↔
44-7124	60cm	60cm
44-7136	91cm	60cm
44-7142	107cm	60cm
44-7142 W	107cm	80cm
44-7148	122cm	60cm
44-7148 W	122cm	80cm



STEERSOtuff®

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-7440/7600 Pants with closed back



- < A-grade side split cow leather
- < KEVLAR® 5 ply
- < Leather thickness: min. 1mm

	↕
44-7440/7600M	100cm
44-7440/7600L	112cm
44-7440/7600XL	116cm
44-7440/7600XXL	122cm
44-7440/7600XXXL	128cm



STEERSOtuff®


EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-7440/7648 Pants with breast protection and closed back, bib & brace

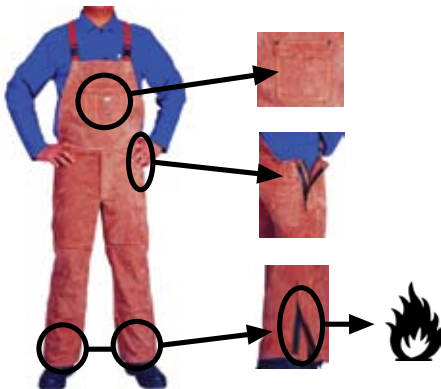

- < A-grade side split cow leather
- < KEVLAR® 5 ply
- < Leather thickness: min. 1mm

	↔
44-7440/7648M	136cm
44-7440/7648L	140cm
44-7440/7648XL	144cm
44-7440/7648XXL	148cm
44-7440/7648XXXL	152cm
44-7440/7648XXXXL	156cm



STEERSOtuff®

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

Clothing

44-7023 Sleeves



- < A-grade side split cow leather
- < KEVLAR® 5 ply
- < Leather thickness: min. 1mm
- < Balancing strap system

44-7023

58cm



STEERSOtuff®

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-7106 Spats for Shoe Protection (15cm)



- < A-grade side split cow leather
- < KEVLAR® 5 ply
- < Leather thickness: min. 1mm
- < With under the shoe an elastic strap to secure shoe top cover

44-7106

33-43cm 15cm



STEERSOtuff®


EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-7114 Spats for leg and shoe protection (36cm)



44-7114EXT



44-7114EXT + 44-7114 = 52 - 62cm

- < A-grade side split cow leather
- < KEVLAR® 5 ply
- < Leather thickness: min. 1mm
- < With bendable insert at shin and shoe top to allow shape formation

44-7114

37-47cm 36cm

- < 15cm wide extension for 44-7114

44-7114EXT

15cm



STEERSOtuff®

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60041277 0001
TÜV 21173205 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

Clothing

44-2530

Jacket with flame retardant back



- < Side split cow leather
- < KEVLAR® 3 ply √
- < Leather thickness: min. 1mm
- < Back: flame retardant cotton 315 gr./sq.m.

44-2530M	76cm	100cm
44-2530L	81cm	112cm
44-2530XL	86cm	124cm
44-2530XXL	91cm	136cm
44-2530XXXL	96cm	148cm

CE



Golden Brown

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079303 0001
TÜV 21190228 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-2847

Shoulder Apron



- < Side split cow leather
- < KEVLAR® 3 ply √
- < Leather thickness: min. 1mm

44-2847L	92cm	58cm
44-2847XL	92cm	63cm

CE



Golden Brown

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079303 0001
TÜV 21190228 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-2800

Cape Sleeves



- < Side split cow leather
- < KEVLAR® 3 ply √
- < Leather thickness: min. 1mm

44-2800L	112cm
44-2800XL	124cm
44-2800XXL	136cm

CE



Golden Brown

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079303 0001
TÜV 21190228 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-28.. Apron for Cape Sleeves



- < Side split cow leather
- < KEVLAR® 3 ply √
- < Leather thickness: min. 1mm

44-2828
44-2836

↕	↔
71cm 91cm	55cm 55cm



Golden Brown

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079315 0001
TÜV 21190317 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-21.. Aprons



- < Side split cow leather
- < KEVLAR® 3 ply √
- < Leather thickness: min. 1mm
- < Self-balancing strap system

44-2136
44-2142
44-2142 W

↕	↔
91cm 107cm 107cm	60cm 60cm 80cm



Golden Brown

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079315 0001
TÜV BP 60079303 0001
TÜV 21190228 001,
TÜV 21190317 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-2600 Pants



- < Side split cow leather
- < KEVLAR® 3 ply √
- < Leather thickness: min. 1mm

44-2600M
44-2600L
44-2600XL

↕
110cm 112cm 116cm



Golden Brown

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079303 0001
TÜV 21190228 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

Clothing

44-2648

Pants with breast protection, bib & brace



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1mm

44-2648M	136cm
44-2648L	140cm
44-2648XL	144cm
44-2648XXL	148cm



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079303 0001
TÜV 21190228 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-2321, 44-2321XL Sleeves



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1mm
- Hook and loop closure at the top
- Wrist-end with elastic band included

44-2321	52cm	21-31cm	34-47cm
44-2321XL	52cm	21-31cm	45-60cm



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079313 0001
TÜV 21190282 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

44-2160

Spats for leg and shoe protection



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1mm
- With under the shoe an elastic strap to secure shoe top cover

44-2106	34-43cm	15cm
---------	---------	------



EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079315 0001
TÜV 21190317 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

WELDAS®

Golden Brown™

Clothing

44-2114 Spats for leg and shoe protection (36cm)



- < Side split cow leather
- < KEVLAR® 3 ply √
- < Leather thickness: min. 1mm
- < With bendable insert at shin and shoe top to allow shape formation

44-2114

37-47cm 36cm

CE



Golden Brown

EN ISO 11611:2007
CLASS 2/A1
TÜV BP 60079315 0001
TÜV 21190317 001



www.weldas.com

EN ISO 11611:2007
CLASS 2/A1

Yellowjacket®

Clothing

33-3060 Jacket, flame retardant cotton with leather sleeves



- < 315 gr./m² flame retardant cotton body
- < Split cow leather sleeves
- < KEVLAR® 3 ply √

33-3060S
33-3060M
33-3060L
33-3060XL
33-3060XXL
33-3060XXXL
33-3060XXXXL

76cm 108cm
76cm 116cm
81cm 127cm
86cm 138cm
91cm 147cm
96cm 158cm
96cm 168cm

CE



Yellowjacket®

EN ISO 11611:2003
CLASS 1
TÜV BP 6008974
TÜV 2114005 001



www.weldas.com

EN ISO 11611:2003
CLASS 1

Clothing

33-2300 Jacket



44-7820
44-7828
44-7836
44-7836XL
(see page #)



44-2828
44-2836
(see page #)

- < 315 gr./m² flame retardant cotton
- < KEVLAR® 3 ply √
- < Possibility to add a *Lava Brown*™ or *Golden Brown*™ apron to this jacket
- < 25 x ■ (without apron)

33-2300M	76cm	102cm
33-2300L	81cm	111cm
33-2300XL	86cm	118cm
33-2300XXL	91cm	123cm
33-2300XXXL	96cm	126cm
33-2300XXXXL	96cm	132cm



Fire Fox

EN ISO 11611:2003
CLASS 1
TÜV BP 60008972
TÜV 21114004 001



www.weldas.com

**EN ISO 11611:2003
CLASS 1**

33-2600 Pants



- < 315 gr./m² flame retardant cotton
- < KEVLAR® 3 ply √
- < Possibility to add knee pads
- < 25 x ■

33-2600M	76cm
33-2600L	76cm
33-2600XL	78cm
33-2600XXL	81cm
33-2600XXXL	82cm
33-2600XXXXL	83cm



Fire Fox

EN ISO 11611:2003
CLASS 1
TÜV BP 6008972
TÜV 21114004 001



www.weldas.com

**EN ISO 11611:2003
CLASS 1**

33-2700 Pants with breast protection, bib and brace



- < 315 gr./m² flame retardant cotton
- < KEVLAR® 3 ply √
- < Possibility to add knee pads
- < 25 x ■

33-2700M	76cm
33-2700L	76cm
33-2700XL	78cm
33-2700XXL	81cm
33-2700XXXL	82cm
33-2700XXXXL	83cm



Fire Fox

EN ISO 11611:2003
CLASS 1
TÜV BP 60008972
TÜV 21114004 001



www.weldas.com

**EN ISO 11611:2003
CLASS 1**

Clothing

33-2800 Coverall



{ 315 gr./m² flame retardant cotton
 { KEVLAR® 3 ply √
 { Possibility to add knee pads
 { 25 x ■

33-2800M
 33-2800L
 33-2800XL
 33-2800XXL
 33-2800XXXL
 33-2800XXXXL



152cm
 154cm
 157cm
 164cm
 175cm
 177cm



Fire Fox

EN ISO 11611:2003
 CLASS 1
 TÜV BP 60008972
 TÜV 21114004 001



www.weldas.com

EN ISO 11611:2003
CLASS 1

33-2320 Sleeves



{ 315 gr./m² flame retardant cotton
 { KEVLAR® 3 ply √
 { 25 x ■

33-2320



52cm



19-32cm



36-47cm



Fire Fox

EN ISO 11611:2003
 CLASS 1
 TÜV BP 60008972
 TÜV 21114004 001



www.weldas.com

EN ISO 11611:2003
CLASS 1

WELDAS[®]

Fire Fox[™]

Flame Retardant Head Protection

23-3612
FR Doo-Rag Blue



Fire Fox



EN ISO 11611:2003
CLASS 2



EN ISO 11611:2003
CLASS 2
TÜV BP 60008973
TÜV 21114006 001



www.weldas.com

25 x

23-3613
FR Doo-Rag Orange



23-8000L
FR Beanie



23-2800
23-2800XL

56-59cm
59-62cm



WELDAS®

Fire Fox™

Flame Retardant Head Protection

**23-*514
FR Cap Orange**



CE



Fire Fox



EN ISO 11611:2003
CLASS 2



EN ISO 11611:2003
CLASS 2
TÜV BP 60008973
TÜV 21114006 001



www.weldas.com

25 x

**23-*515
FR Cap Blue**



Choose the best size:

* = 1, 2, 3, 4, 5, 6, 7

Size	Article number	
7	23-1xxx	22.0", 56cm.
7 1/8	23-2xxx	22.4", 57cm.
7 1/4	23-3xxx	22.8", 58cm.
7 3/8	23-4xxx	23.2", 59cm.
7 1/2	23-5xxx	23.6", 60cm.
7 5/8	23-6xxx	23.9", 61cm.
7 3/4	23-7xxx	24.0", 62cm.

WELDAS®

Fire Fox™

Helmet Hoods

23-6680



23-6680/LV




23-6690



23-6680 / 23-6680LV / 23-6690: 64cm
23-6680XL: 68cm

23-6680 / 23-6680LV / 23-6690: 42 - 53cm
23-6680XL: 52 - 65cm



23-6680: 41cm
23-6690: 41cm
23-6680XL: 44cm
23-6680/LV: 62cm

CE



Fire Fox

EN ISO 11611:2003
CLASS 2
TÜV BP 60008973
TÜV 21114006 001



www.weldas.com

EN ISO 11611:2003
CLASS 2



25 x



SWEATSOpad®

Helmet Comforters

20-3100V + 20-3100V/17



SWEATSOpad®

5 x ■

20-3100V	22cm
20-3100V/17	17cm



EN ISO 11611:2003
CLAUSE 6.6
TÜV AK 60013119 0001
TÜV 21120493 001




www.weldas.com

44-3008LB



- High heat reflective hand shield
- Split cowhide leather and fiber glass back
- Extra heat resistant

KEVLAR® 5 ply √



EN 532
TÜV 744-800515/25




www.weldas.com

10-1099




- TIG finger
- For extra protection
- For extra stability in position welding
- Silica fabric
- With hook and loop

KEVLAR® 3 ply √




44-7900

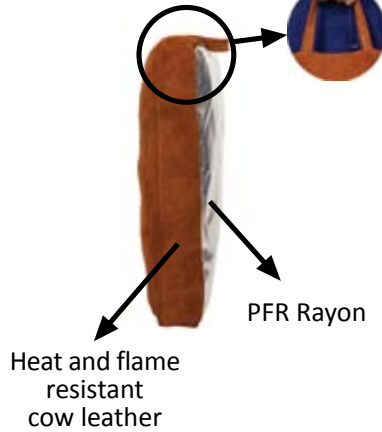


< 50 x 50 x 8cm
> KEVLAR® 3 ply √

44-7910

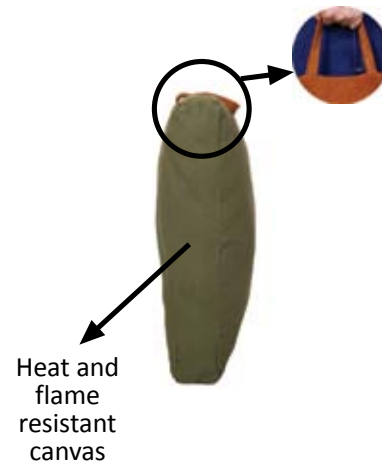

< 50 x 50 x 8cm
> KEVLAR® 3 ply √

44-7920

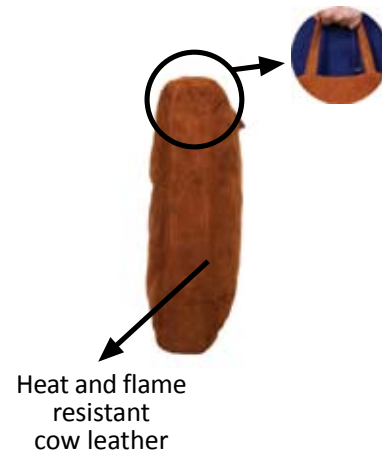

< 50 x 50 x 8cm
> KEVLAR® 3 ply √

Cable Covers

V = Hoop & Loop



T = Tube



Z = Zipper



Light Brown Cowhide



Grain Black Cowhide



Black Flame Retardant Nylon



KEVLAR® 3 ply √

Available in many length / diameter combinations

Article Number	∅	↑ ↓	Material
44-3001Z	22mm	1m	Light Brown Cowhide
44-3010Z	22mm	3m	Light Brown Cowhide
44-3022Z	22mm	6.7m	Light Brown Cowhide
44-3601Z	22mm	1m	Grain Black Pigskin
44-3628Z	28mm	1m	Grain Black Pigskin
44-3922Z	22mm	3.9m	Light Brown Cowhide
44-3928Z	28mm	3.9m	Light Brown Cowhide
44-4001Z	32mm	1m	Light Brown Cowhide
44-4525Z	37mm	2.5m	Light Brown Cowhide
44-4535Z	37mm	3.5m	Light Brown Cowhide
44-7922Z	22mm	7.9m	Light Brown Cowhide
44-7928Z	28mm	7.9m	Light Brown Cowhide
44-5030V/MTR	30mm	>1m	Light Brown Cowhide, PER METER
44-5050V/MTR	50mm	>1m	Light Brown Cowhide, PER METER
44-0550V	50mm	5m	Light Brown Cowhide
44-1050V	50mm	10m	Light Brown Cowhide
44-1022T	22mm	1m	Light Brown Cowhide
44-1027T	27mm	1m	Light Brown Cowhide
44-4023Z	23mm	4m	Black Flame Retardant Nylon Fibre
44-4028Z	28mm	4m	Black Flame Retardant Nylon Fibre
44-8023Z	23mm	8m	Black Flame Retardant Nylon Fibre
44-8028Z	28mm	8m	Black Flame Retardant Nylon Fibre

WELDAS®

LAVAshield®

Welding Screens

55-6166, 55-6168 Orange/Red



55-6166 1.8 x 1.8 mtr
55-6168 1.8 x 2.4 mtr

- Heat sealed seams and grommets
- Nylon ties are furnished for convenience and secure fastening to the quick connection Weldas frame: 55-8668



55-6166: 28 pcs, plastic grommets
55-6168: 32 pcs, plastic grommets

CE


LAVAshield®

EN 1598 : 2011
ECS: 00101-ECS-13



www.weldas.com

55-7166, 55-7168 Green



55-7166 1.8 x 1.8 mtr
55-7168 1.8 x 2.4 mtr

- Heat sealed seams and grommets
- Nylon ties are furnished for convenience and secure fastening to the quick connection Weldas frame: 55-8668



55-7166: 28 pcs, plastic grommets
55-7168: 32 pcs, plastic grommets

CE

LAVAshield®

EN 1598 : 2011
ECS: 00102-ECS-13




www.weldas.com

COMBOframe™

Modular Frame

55-8668

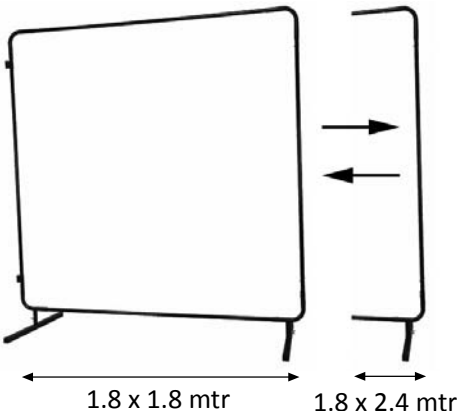

55-8668 1.8 x 1.8 mtr / 1.8 x 2.4 mtr

- Weldas **COMBOframe**™ suitable for the welding screens: 55-6166, 55-6168, 55-7166, 55-7168
- Will be delivered as only frame (including swivelset), without screens

COMBOframe™