


# H<sub>2</sub> SENSOR MODULE

## FH2-HY11-HC

for HYDROGEN LEAK DETECTION

**FH2-HY11-HC** is a newly developed hydrogen sensor module, specifically designed for preventing hydrogen leaks in Fuel-Cell. This module attaches with connector cable.

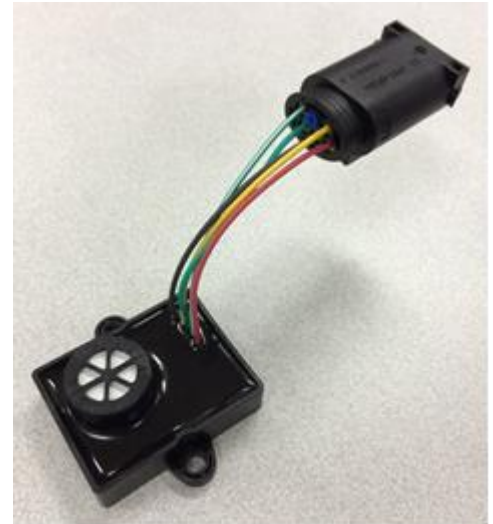

### Features

- Quick start-up time
- Rapid response speed
- Compact and light weight
- Long life
- High Selectivity

### Specification

Item	Contents
Detection method	Catalytic combustion
Detection gas / range	Hydrogen / 0 to 4 vol. %
Output signal	0.5 V to 4.5 V DC proportional to hydrogen gas concentration
Speed of response (T90)	< 3 seconds
Start-up time	< 1 second
Supply voltage	5 V ± 0.25V DC
Power consumption	Approx. 0.25 W
Operating temperature	-35 °C to 85 °C (no condensation)
Storage temperature	-40 °C to 85 °C (no condensation)
Dimensions	35.0 (W) × 45.0 (D) × 19.75 (H) mm (without the attaching part)
Weight	Approx. 36g
Applications	Fuel Cell systems for commercial/domestic fields

Please contact

**Nissha FIS, Inc.**

2-4-28 Tagawa, Yodogawa-ku,

Osaka 532-0027, Japan

Tel: +81-6-7176-3911

Fax: +81-6-7176-3912

<http://www.fisinc.co.jp/en/>

Feb.2020