

52.

BRIDE PIVOTANTE PNEUMATIQUE A DOUBLE EFFET




I8 - I3/I4/I5 - BR/BL



Malgré leurs forces de serrage pas très élevées, ces brides sont de plus en plus souvent utilisées pour l'automatisation.

Brides sans bras de fixation.


Installation de la bride.

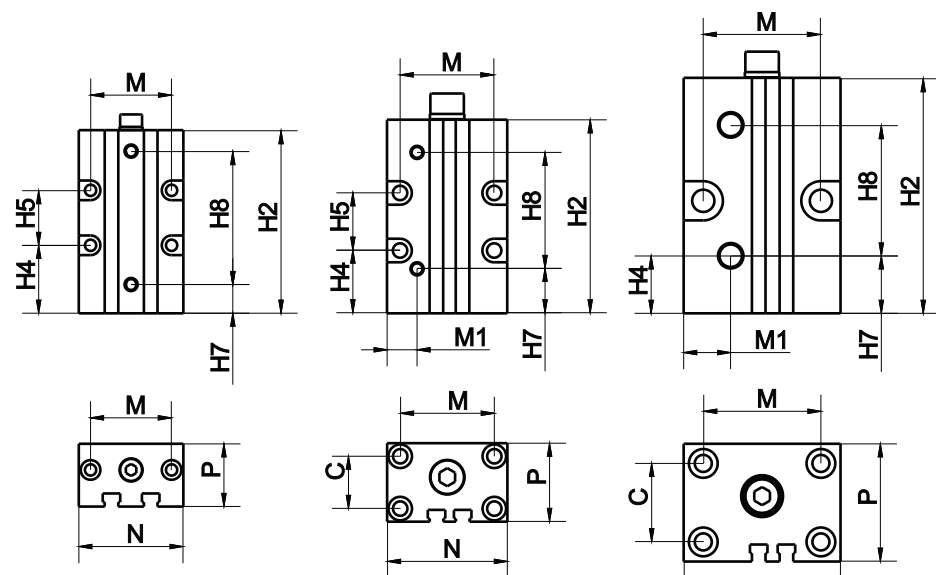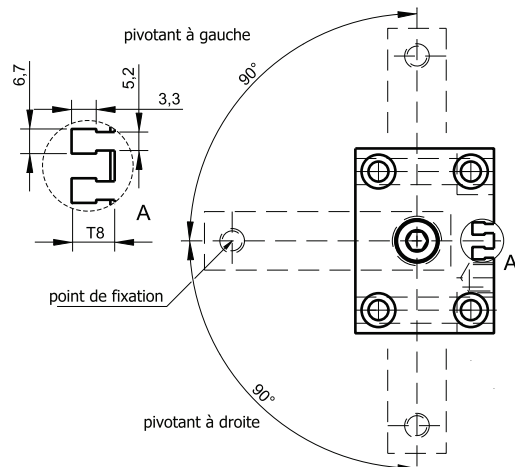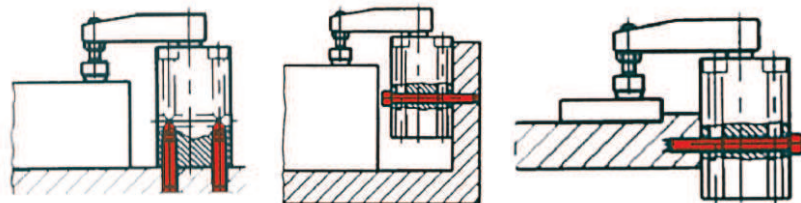

Taille: 12, 16

Taille: 20

Taille: 25, 32, 40, 50, 63

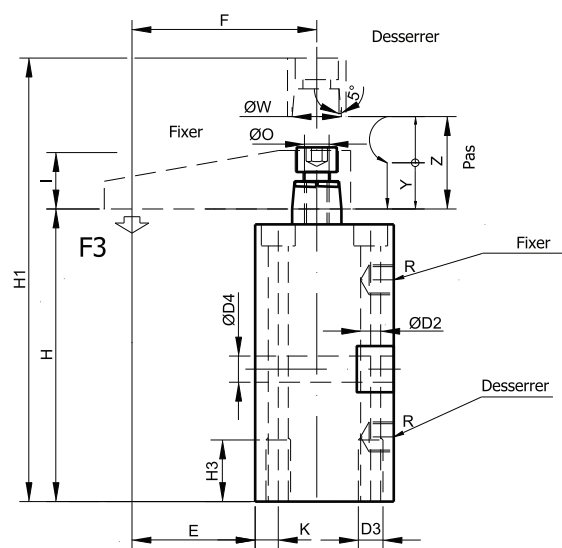

N°		 [kg]	Taille	F3 [daN]	C	ØD2	D3	ØD4	E	F	H	H1	H2	H3	H4	H5	H7	H8	I	K
181496 BR	181397 BL	0,20	12	3	-	4,3	M5	4,3	25,0	35	76	105	70	15	26	21	11	51,0	12	10,0
181504 BR	181405 BL	0,30	16	6	-	4,3	M5	4,3	30,0	41	76	105	70	15	26	21	11	51,0	12	13,0
181512 BR	181413 BL	0,40	20	8	20	5,5	M6	5,5	35,0	48	80	125	74	20	24	22	17	44,5	16	5,0
181520 BR	181421 BL	0,60	25	17	20	6,5	M8	8,5	35,0	50	83	125	78	20	32	-	17	44,5	16	7,5
181538 BR	181439 BL	0,80	32	27	30	6,5	M8	8,5	40,0	60	96	145	90	20	43	-	22	50,0	19	7,5
181546 BR	181447 BL	0,92	40	45	37	8,5	M10	8,5	45,5	70	96	145	90	25	40	-	20	52,0	19	9,0
181553 BR	181454 BL	1,00	50	70	46	8,5	M10	10,5	49,0	80	106	162	100	30	45	-	25	53,5	25	9,5
181561 BR	181462 BL	1,15	63	110	60	10,5	M12	10,5	52,5	90	106	162	100	30	36	-	28	53,0	25	10,0

N°	Taille	M	M1	N	ØO	P	R	T8	ØW	Diamètre du piston	Y	Z
I81496 BR I81397 BL	12	31	20,0	40	M5	24	M5	5,0	8	12	10	17
I81504 BR I81405 BL	16	31	21,0	42	M5	28	M5	4,5	8	16	10	17
I81512 BR I81413 BL	20	36	11,5	46	M8	30	M5	4,5	12	20	14	27
I81520 BR I81421 BL	25	40	17,0	55	M8	35	M5	5,0	14	25	14	27
I81538 BR I81439 BL	32	45	18,0	60	M8	45	G1/8	6,5	16	32	14	30
I81546 BR I81447 BL	40	52	22,0	70	M8	55	G1/8	8,0	16	40	15	30
I81553 BR I81454 BL	50	66	25,0	85	M10	65	G1/8	6,5	20	50	15	31
I81561 BR I81462 BL	63	80	30,0	100	M10	80	G1/8	8,5	20	63	15	31

Possibilité d'utiliser
le détecteur FESTO 24V,
connecteur M8 SEM-8-S-LED-24

Nous nous réservons le droit de modifier le contenu sans information préalable.