



# Lineal Led Serie SL9070

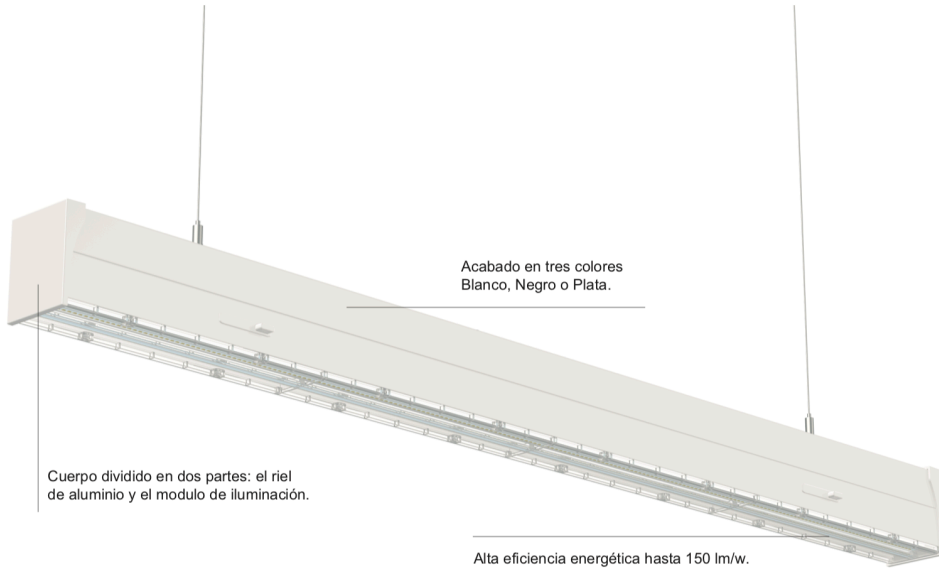

Modelo	CCT	Light output (±10%)lm	Medida mm	CRI
JVJ-SL9070-040-AW-CW	5500-6500K	6105	1200	≥80
JVJ-SL9070-040-AW-NW	3900-4500K	5810	1200	≥80
JVJ-SL9070-040-AW-WW	2700-3200K	5530	1200	≥80



Modelo	CCT	Light output (±10%)lm	Medida mm	CRI
JVJ-SL9070-050-AW-CW	5500-6500K	7400	1500	≥80
JVJ-SL9070-050-AW-NW	3900-4500K	6800	1500	≥80
JVJ-SL9070-050-AW-WW	2700-3200K	6600	1500	≥80




Modelo	CCT	Light output (±10%)lm	Medida mm	CRI
JVJ-SL9070-075-AW-CW	5500-6500K	10500	2400	≥80
JVJ-SL9070-075-AW-NW	3900-4500K	10010	2400	≥80
JVJ-SL9070-075-AW-WW	2700-3200K	9520	2400	≥80

Carril principal con accesorios de conexión incorporados, para conectar la parte electrónica y la estructura.



Diseño de circuito electrónico trifásico y de 4 hilos, cables preinstalados de 5/7 con núcleo de cobre de 2,5 mm<sup>2</sup>. El carril continuo máximo es de 250 m a 22V CA y 110 m a 110V CA.



Diferentes modos de instalación: Suspendido o Superficie.

